

RoHS

Square Shape Compact Cylinder

Size 20


Now, more compact and lightweight due to the adoption of a square shape piston!

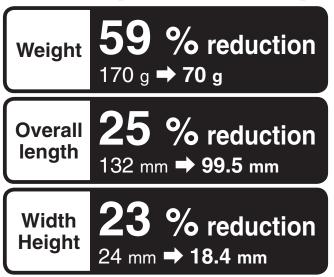

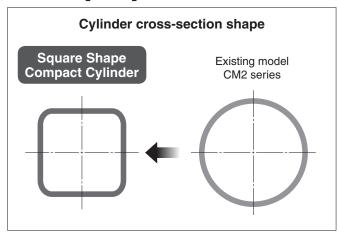

□24 mm

 Compared with the existing CM2 series model, Ø 20, 50 mm stroke. Boss-cut. Female rod end

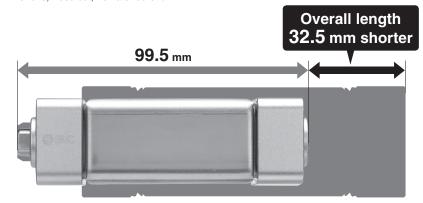

Square Shape
Compact Cylinder
Size 20, 50 mm stroke


Existing CM2 series model
Ø 20, 50 mm stroke,
Boss-cut, Female rod end

Cover dimensions

2.8 mm shorter

Total of both sides: **5.6** mm)


■ Reduced cover dimensions (1 size smaller than the existing model) but with increased output

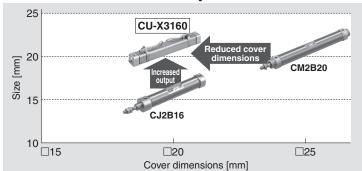

CU-X3160

■ Small auto switches can be mounted on 4 surfaces.

Applicable auto switch: D-M9□

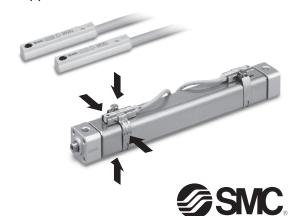

19-EU724-UK

Specifications

Size	20 (Equiv. Ø 20 piston area)							
Action	Double acting, Single rod							
Fluid	Air							
Proof pressure	1.0 MPa							
Max. operating pressure	0.7 MPa							
Min. operating pressure	0.05 MPa							
Ambient and fluid temperatures	Without auto switch: 5 to 70 $^{\circ}$ C (No freezing) With auto switch : 5 to 60 $^{\circ}$ C							
Lubrication	Not required (Non-lube)							
Piston speed	50 to 500 mm/s							
Stroke length tolerance	+2.0 * 1 0							
Cushion	Rubber bumper							
Allowable kinetic energy	0.11 J							
Port size	M5							
Mounting	Basic (Female threads on both covers)							

^{*1} Stroke length tolerance does not include the amount of bumper change.

Depending on the system configuration selected, the specified speed may not be satisfied.

Standard Strokes


		[mm]
Size	Standard stroke	
20	25, 50, 75, 100, 125, 150	

Theoretical Output


				OUT		II	N			
				_		•		[N]		
Size	Rod operating	Piston area [mm²]	Operating air pressure [MPa]							
Size	direction		0.2	0.3	0.4	0.5	0.6	0.7		
20	IN	257	51	77	103	128	154	179		
20	OUT	285	57	85	114	142	171	199		


^{*} Theoretical output [N] = Pressure [MPa] x Piston area [mm²]

Dimensions

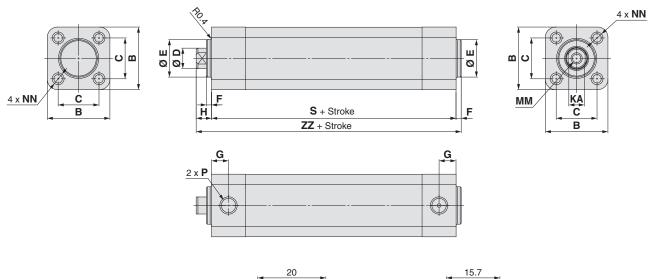

Auto switch bracket dimensions





 [r												[mm]	
Size	В	С	D	E	F	G	Н	KA	NN	MM	Р	S	ZZ
20	18.4	12	6	11	1.5	5	4.5	5	M3 x 0.5 depth 5	M3 x 0.5 depth 6	M5 x 0.8	43.5	49.5

SMC Corporation (Europe)

SMC Corporation

Akihabara UDX 15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN Phone: 03-5207-8249 Fax: 03-5298-5362 SMC CORPORATION All Rights Reserved

European Marketing Centre (EMC)

Zuazobidea 14, 01015 Vitoria Tel: +34 945-184 100 Fax: +34 945-184 124 URL http://www.smc.eu