


# Pinch Valve




The fluid does not come into contact with the moving parts of the valve, so there is no inflow of contaminants. By discarding a tube after use, the need for a washing process is eliminated, thus ensuring good hygiene.

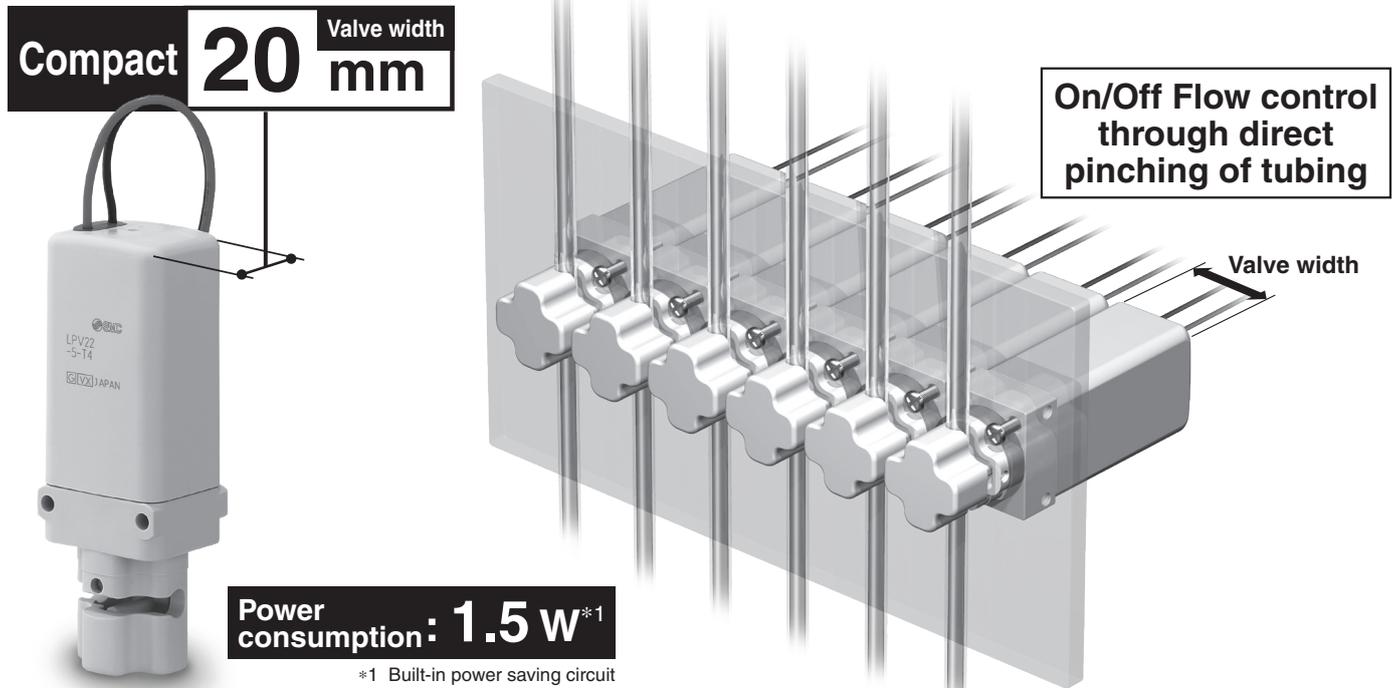

## Improved tubing life

Less damage to the tube due to an arc shape of the tube clamp

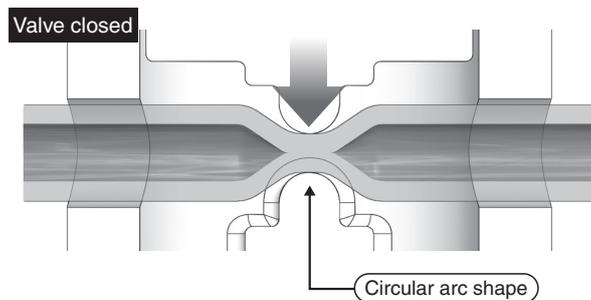


## Easy tubing replacement

**New**

U shaped tube slot

**Existing model**


O shaped tube slot

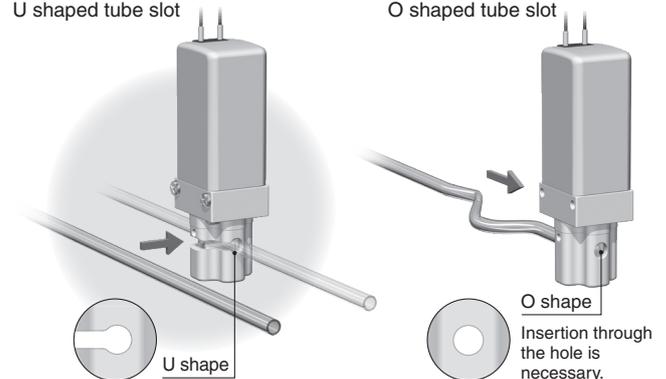

## 2 patterns of mounting


### Panel mounting

Electrical faults due to scattering of liquid prevented by panels between the flow and coil sides

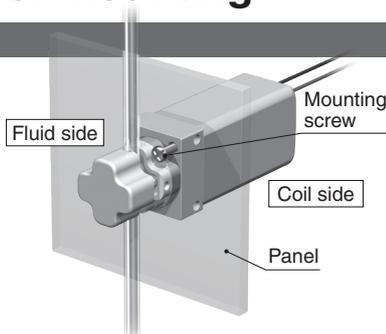

### Direct mounting

Can be mounted from the front

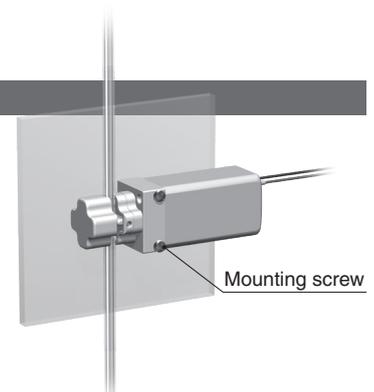

# LPV22-X1



19-EU741-UK

# LPV22-X1



## Specifications


<b>Applicable tubing*1</b>	Silicone O.D.: $\varnothing 4$ I.D.: $\varnothing 2$ O.D.: $\varnothing 5/32$ " I.D.: $\varnothing 1/32$ "
<b>Type of actuation</b>	Direct operated solenoid
<b>Valve type</b>	N.O.
<b>Rated voltage</b>	24/12 VDC
<b>Allowable voltage fluctuation</b>	$\pm 10\%$ of the rated voltage
<b>Power consumption</b>	Starting: 8 W Holding: 1.5 W [Built-in power saving circuit]
<b>Ambient temperature</b>	0 to 50 °C
<b>Operating pressure</b>	0 to 0.2 MPa
<b>Impact/Vibration resistance <math>m/s^{2*2}</math></b>	150/30
<b>Enclosure</b>	IP40 equivalent


\*1 Silicone tubing should be provided by the customer.

\*2 Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the armature in both energized and de-energized states every once for each condition. (Value in the initial state)

Vibration resistance: No malfunction occurred in one sweep test between 45 and 2000 Hz in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states for each condition. (Value in the initial state)

## Dimensions

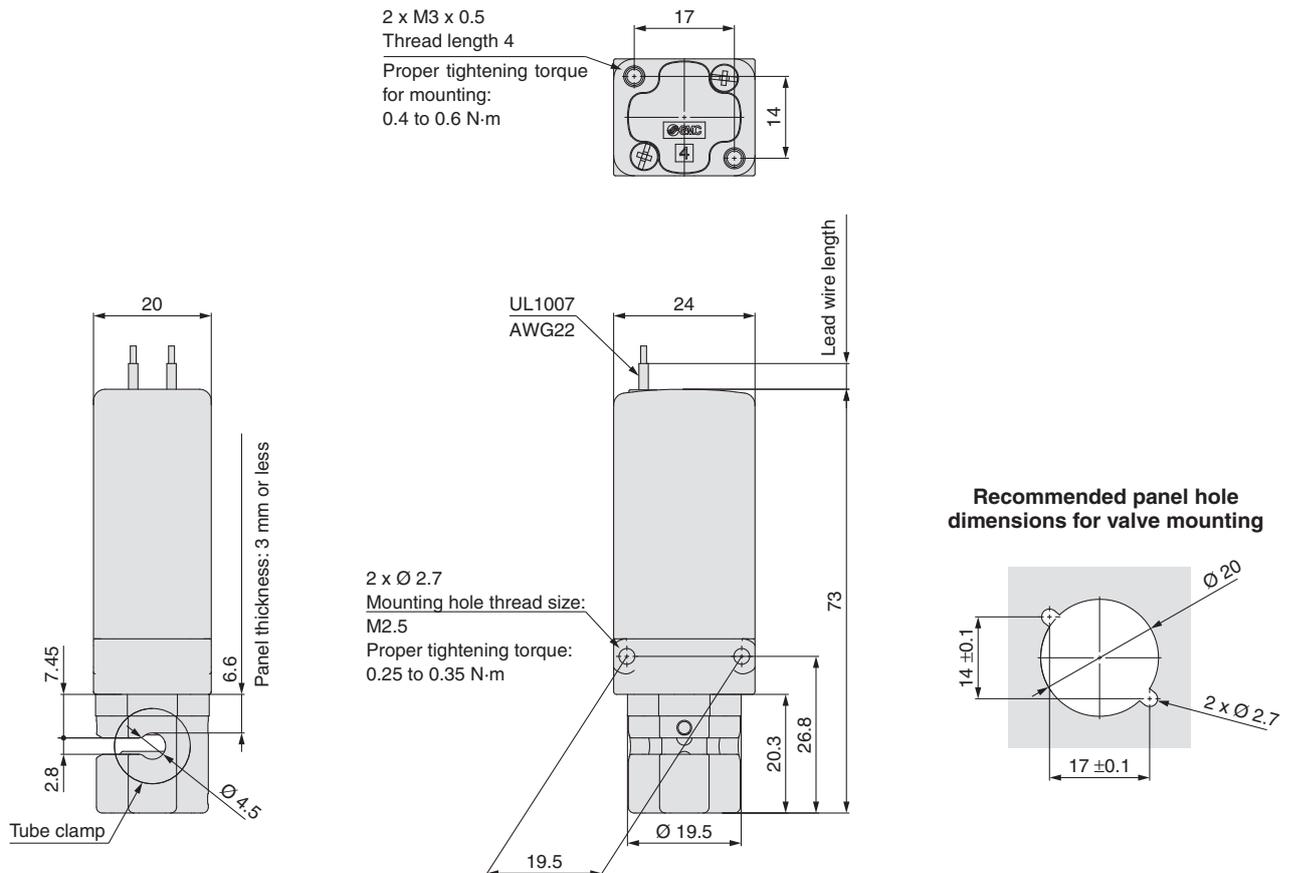



## SMC Corporation (Europe)

<b>Austria</b>	+43 (0)2262622800	www.smc.at	office@smc.at
<b>Belgium</b>	+32 (0)33551464	www.smc.be	info@smc.be
<b>Bulgaria</b>	+359 (0)2807670	www.smc.bg	office@smc.bg
<b>Croatia</b>	+385 (0)13707288	www.smc.hr	office@smc.hr
<b>Czech Republic</b>	+420 541424611	www.smc.cz	office@smc.cz
<b>Denmark</b>	+45 70252900	www.smc.dk.com	smc@smcdk.com
<b>Estonia</b>	+372 6510370	www.smc.pneumatics.ee	info@smcee.ee
<b>Finland</b>	+358 207513513	www.smc.fi	smc.fi@smc.fi
<b>France</b>	+33 (0)164761000	www.smc-france.fr	info@smc-france.fr
<b>Germany</b>	+49 (0)61034020	www.smc.de	info@smc.de
<b>Greece</b>	+30 210 2717265	www.smchellas.gr	sales@smchellas.gr
<b>Hungary</b>	+36 23513000	www.smc.hu	office@smc.hu
<b>Ireland</b>	+353 (0)14039000	www.smcautomation.ie	sales@smcautomation.ie
<b>Italy</b>	+39 03990691	www.smcitalia.it	mailbox@smcitalia.it
<b>Latvia</b>	+371 67817700	www.smc.lv	info@smc.lv

<b>Lithuania</b>	+370 5 2308118	www.smclt.lt	info@smclt.lt
<b>Netherlands</b>	+31 (0)205318888	www.smc.nl	info@smc.nl
<b>Norway</b>	+47 67129020	www.smc-norge.no	post@smc-norge.no
<b>Poland</b>	+48 222119600	www.smc.pl	office@smc.pl
<b>Portugal</b>	+351 214724500	www.smc.eu	apoioclientept@smc.smces.es
<b>Romania</b>	+40 213205111	www.smcromania.ro	smcromania@smcromania.ro
<b>Russia</b>	+7 8123036600	www.smc.eu	sales@smcru.com
<b>Slovakia</b>	+421 (0)413213212	www.smc.sk	office@smc.sk
<b>Slovenia</b>	+386 (0)73885412	www.smc.si	office@smc.si
<b>Spain</b>	+34 945184100	www.smc.eu	post@smc.smces.es
<b>Sweden</b>	+46 (0)86031200	www.smc.nu	smc@smc.nu
<b>Switzerland</b>	+41 (0)523963131	www.smc.ch	info@smc.ch
<b>Turkey</b>	+90 212 489 0 440	www.smc.pnomatik.com.tr	info@smcpnomatik.com.tr
<b>UK</b>	+44 (0)845 121 5122	www.smc.uk	sales@smc.uk

**SMC Corporation** Akihabara UDX 15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN Phone: 03-5207-8249, Fax: 03-5298-5362