




Expertise – Passion – Automation



Siemens

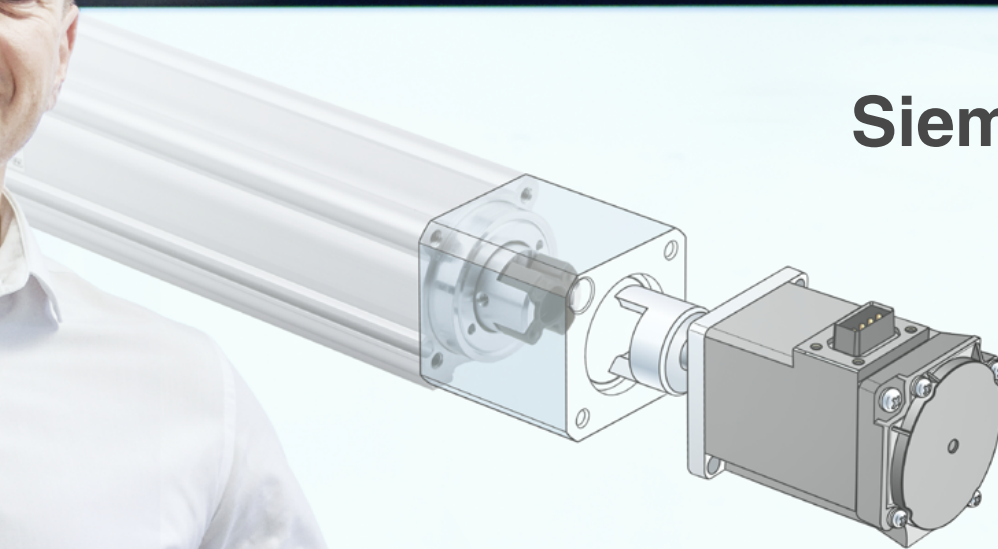

Type		Slider					Rod			Slide Table		
Series	LEFS	LEFB	LEJS	LEJS-M	LEJS-X	LEY			LEYG		LESYH	
						Motor top/parallel (→, R, L)	In-line motor (D)	In-line motor (D)	Motor top/parallel (→, R, L)	In-line motor (D)	Motor top/parallel (→, R, L)	In-line motor (D)
Drive method	Ball screw	Belt	Ball screw	Belt	Ball screw	Ball screw + Belt	Ball screw	Ball screw	Ball screw + Belt	Ball screw	Ball screw + Belt	Ball screw
Max. speed * [mm/s]	1500	2000	1800	1800	1800	1200	1200	1200	1200	1000	400	400
Positioning accuracy	±0.01	±0.06	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.02	±0.01	±0.01

Your motor, our actuator
SMC solutions for motorless – Siemens

Just imagine you want to buy a new car

Oh man, you really like these comfortable seats, the size and shape with the spacious boot in a manufacturer's model. The luggage during the next family holidays luggage would cease to be a problem. But at the same time, you love the user interface and low fuel consumption of your other car. What a pity, these elements cannot be combined.

Let's transfer this example to industrial automation with electric actuators. You need an axis for a specific workload and cycle time. Your control engineer is an expert for a specific PLC type and has vast experience in setting up a specific motor type. Unfortunately, this motor supplier does not provide a mechanical axis which fits your application.

You could now start to design your own mechanical axis with a lot of external parts, design, test and assembly input. However, this is not really appealing due to resources, procurement, and warranty issues. There is, nevertheless, a manufacturer, offering a perfect axis but with another motor brand which your control engineer has no experience with.



CLEMENS DOPPLER
TEAM LEAD ELECTRICAL TECHNOLOGY

What a pity, these elements cannot be combined in the new actuator, can they?


Yes, with motorless actuators you can very easily combine your favourite manufacturers' motors with a large portfolio of ready-to-use mechanical axes. With SMC in particular there is a plug-and-play solution for the most common motor manufacturers worldwide.

I would say that the benefits for machine builders are clear:

- Let your control engineer work with the system he knows best and is able to implement very quickly
- Keep your stock reduced with just one motor type for your machines
- Only one part number for procurement of the mechanical axis including all parts needed for pairing with the motor
- Ready-to-use sizing software for checking maximum workload, speed, acceleration and cycle time
- Different actuator types can be fitted with the same motor. (E.g., rod types or slider types).


Let SMC help you in your motorless experience

What's in the package?

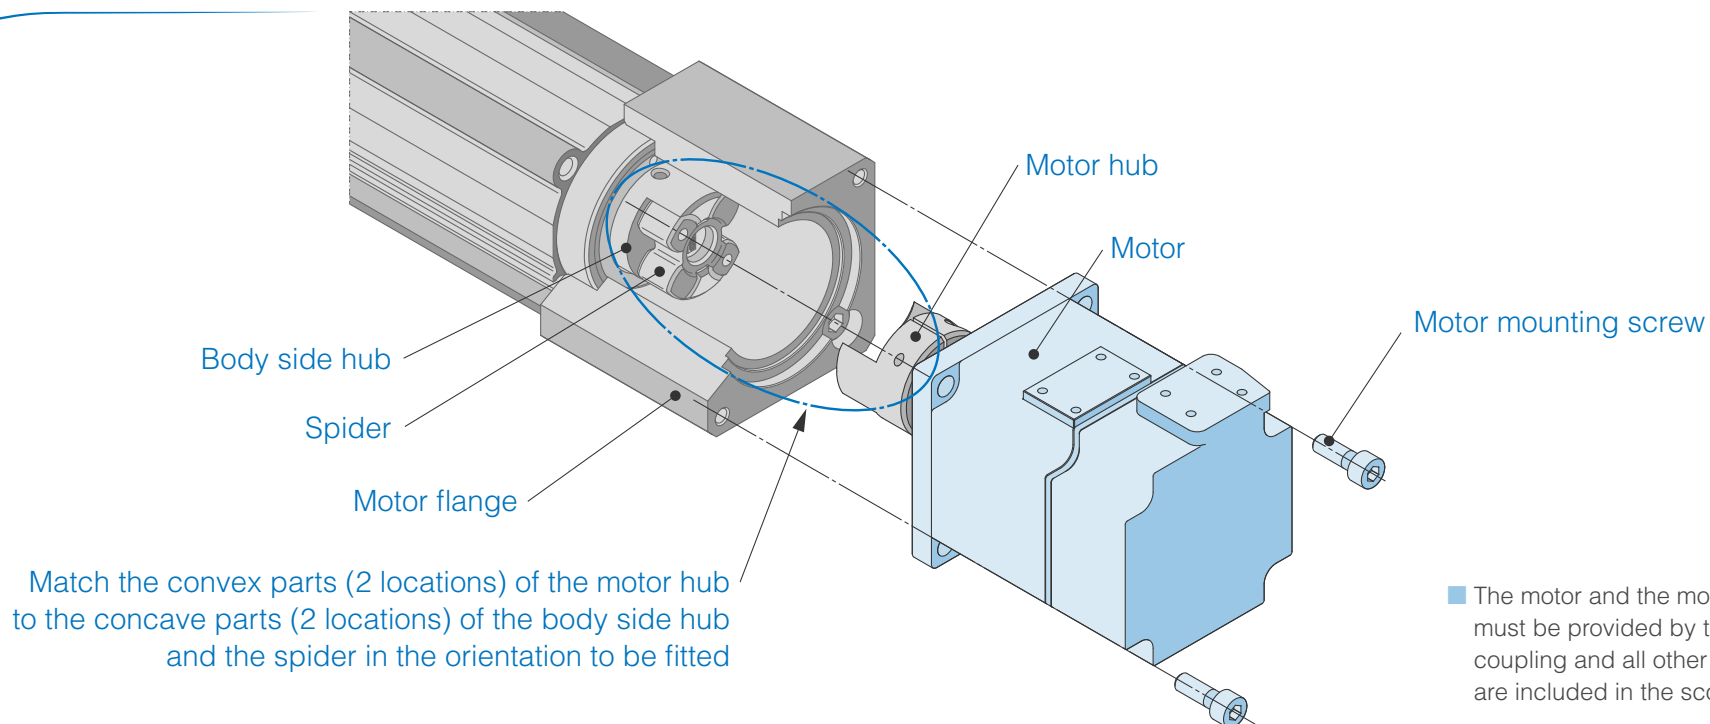


Your motor, our actuator

SMC solutions for motorless – Siemens

	Slider type, ball screw drive – LEFS Series	p4	High precision table – LESYH Series	p8
	Slider type, belt drive – LEFB Series	p5	Rod type, ball screw – LEY Series	p9
	High rigidity slider type – LEJS Series	p6	Guide rod type, ball screw – LEYG Series	p10
	High rigidity and high precision slider type, ball screw – LEKFS Series	p7		


Slider type, ball screw drive

LEFS Series

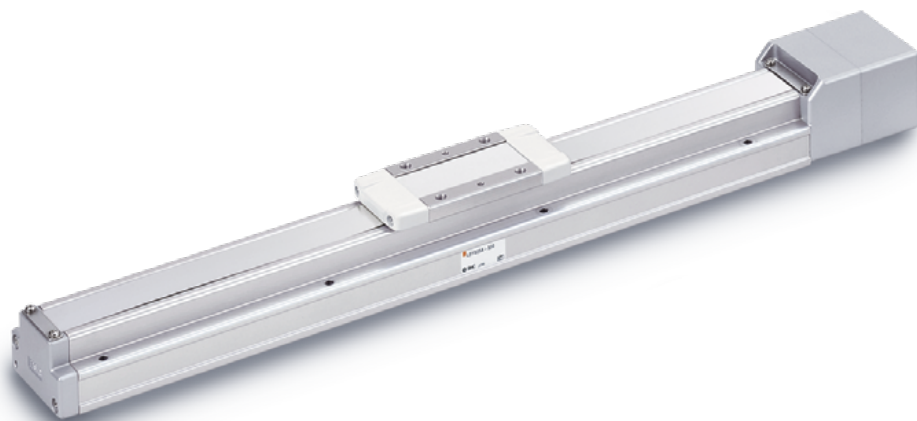

⊕ Your everyday transfer solution for high loads

- High loads transfer & positioning, whatever the needs – Ball screw drive, the best for high loads and repeatable accurate positioning
- Ensure perfect precision – ± 0.01 position repeatability
- Speed up your motion – Up to 1500 mm/s
- Perfect strength-to-speed ratio – Up to 60 kg.

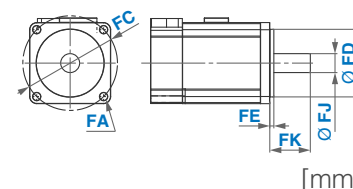

Ask our experts

Series	Mounting/ Special	Direction	Motor	Ø bolt pattern pitch FC	Bolt size FA	Ø circle diameter FD	Max surface depth FE	Ø diameter FJ	Length (± 1 mm) FK-FE
LEFS25	NZ	Inline, parallel (R/L)	1FK2101-0A, 1FK2101-1A, 1FT2102-0A	46	M4	30	3.5	8	25
LEFS32		Inline	1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK	70	M5	50	3.3	14	30
LEFS40			1FK2.03-2AG, 1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK						


Slider type, belt drive

LEFB Series



⊕ Your everyday transfer solution at high speed

- High speed transfer & positioning, whatever the needs – Belt drive for smooth motion at higher speeds or longer movements
- Unbeatable for achieving great strokes – Up to 3000 mm
- Enhance high-speed transfer capacity – Up to 2000 mm/s
- Adapt to the needs – Motor mounting type top or bottom.

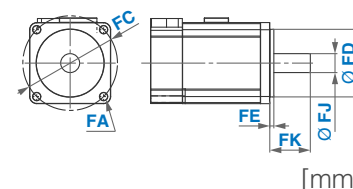

[mm]

Ask our experts

Series	Mounting/ Special	Direction	Motor	Ø bolt pattern pitch FC	Bolt size FA	Ø circle diameter FD	Max surface depth FE	Ø diameter FJ	Length (±1 mm) FK-FE
LEFB25	NZ	Bottom, top	1FK2101-0A, 1FT2102-0A	46	M4	30	3.5	8	25
LEFB32			1FK2.03-2AG, 1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK	70	M5	50	3.3	14	30
LEFB40			1FK2.03-2AG, 1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK						


High rigidity slider type

LEJS Series



⊕ Our most rigid electric actuator

- Ensure robustness in your application – It supports eccentric loads with high accelerations, double-guide system, improving the dynamic allowable moments
- Increase your workload – Up to 85 kg.

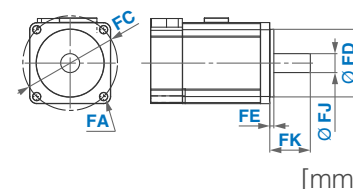


Ask our experts

Series	Mounting/ Special	Direction	Motor	Ø bolt pattern pitch FC	Bolt size FA	Ø circle diameter FD	Max surface depth FE	Ø diameter FJ	Length (±1 mm) FK-FE
LEJS40	NZ	Inline	1FK2.03-2AG, 1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK	70	M5	50	3.3	14	30
LEJS63			1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK						


High rigidity and high precision slider type, ball screw

LEKFS Series

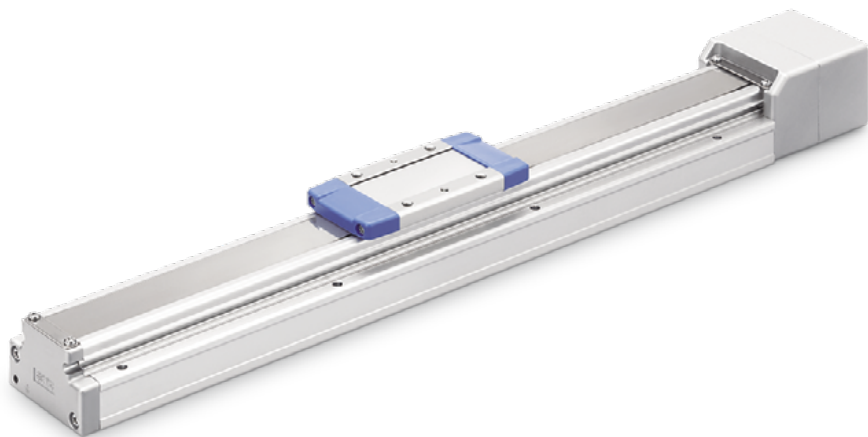

⊕ Foolproof precision transfer, no slack

- Get perfect rigidity & precision – Reduced deflection and table displacement
- Boost product life & reduce maintenance time – Dust seal band magnet (all sizes)
- Guarantee impeccable accuracy – ± 0.01 position repeatability.

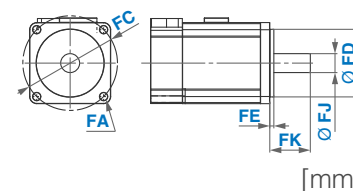

[Ask our experts](#)

Series	Mounting/ Special	Direction	Motor	Ø bolt pattern pitch FC	Bolt size FA	Ø circle diameter FD	Max surface depth FE	Ø diameter FJ	Length (± 1 mm) FK-FE
LEKFS25	NZ	Inline, parallel (R/L)	1FK2101-0A, 1FK2101-1A, 1FT2102-0A, 1FT2102-1A	46	M4	30	3.5	8	25
LEKFS32		Inline	1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK	70	M5	50	3.3	14	30
LEKFS40									


High precision table

LESYH Series



⊕ Extremely precise & compact, designed for transfer applications

- Successfully offer remarkable rigidity and precision – Reduced deflection. ± 0.01 mm position repeatability and great harshness. Lost motion reduction, 0.1 mm
- Boost your productivity – Maximum speed of 400 mm/s and maximum acceleration of 5000 mm/s²
- Use it as you wish – Vertical workload up to 20 kg and horizontal workload up to 12 kg.

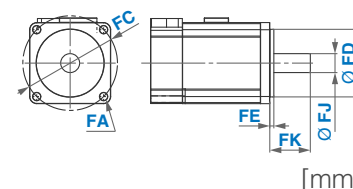

[mm]

[Ask our experts](#)

Series	Mounting/ Special	Direction	Motor	Ø bolt pattern pitch FC	Bolt size FA	Ø circle diameter FD	Max surface depth FE	Ø diameter FJ	Length (±1 mm) FK-FE
LESYH25	NZ	Inline	1FK2101-0A, 1FK2101-1A, 1FT2102-0A, 1FT2102-1A	46	M4	30	3.5	8	25
LESYH32		Inline, parallel (R/L)	1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK	70	M5	50	3.3	14	30


Rod type, ball screw

LEY Series



⊕ Your everyday pushing & pulling solution

- Meet any pushing or pulling challenge – Rod design
- Work it any way – Selectable motor mounting position, top, in-line, right and left mounting positions
- Optimal for achieving great strokes – Up to 800 mm.

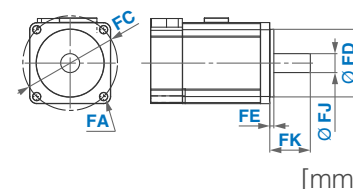

Ask our experts

Series	Mounting/ Special	Direction	Motor	Ø bolt pattern pitch FC	Bolt size FA	Ø circle diameter FD	Max surface depth FE	Ø diameter FJ	Length (±1 mm) FK-FE
LEY25	NZ	Inline	1FK2101-0A, 1FK2101-1A, 1FT2102-0A	46	M4	30	3.5	8	25
LEY32			1FK2.03-2AG, 1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH, 1FT2.03-4AK	70	M5	50	3.3	14	30


Guide rod type, ball screw

LEYG Series



⊕ Your everyday pushing & pulling solution

- Discover the undeniable rigidity – Three-guide system, high non-rotation accuracy ± 0.01 mm
- Perfect to suit your application – Sliding bearings & ball bushing types
- Work it any way – Selectable motor, right and left mounting positions.

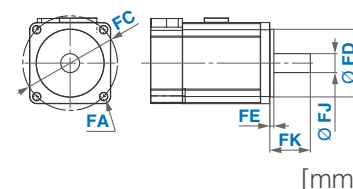

Ask our experts

Series	Mounting/ Special	Direction	Motor	Ø bolt pattern pitch FC	Bolt size FA	Ø circle diameter FD	Max surface depth FE	Ø diameter FJ	Length (± 1 mm) FK-FE
LEYG25	NZ	Inline, parallel (R/L)	1FK2101-0A, 1FK2101-1A, 1FT2102-0A	46	M4	30	3.5	8	25
LEYG32		Inline	1FK2.03-2AH, 1FK2.03-2AK, 1FK2.03-4AG, 1FK2.03-4AH, 1FK2.03-4AK, 1FT2.03-2AG, 1FT2.03-2AH, 1FT2.03-2AK, 1FT2.03-4AG, 1FT2.03-4AH 1FT2.03-4AK	70	M5	50	3.3	14	30



Expertise – Passion – Automation

www.smc.eu

MOTORLESS-SIEMENS-A-UK