

AW20-D to AW60-D, Filter Regulator & Filter Regulator w/Backflow Function AW20-02CE-D

Datasheet


General series information

- ISO 8573-1:2010 compliant
- Maximum flow rate up to 17600 l/min (ANR, 0.7MPa).

Standard specifications

Options	CE (Float Type Auto Drain [N.C.] + Square embedded type pressure gauge [with limit indicator])
Drain Guide	Standard
Pressure Units	Standard (Name Plate, Caution Plate for Bowl, and Pressure Gauge: MPa)
Body Size	20
Set pressure	0.05 to 0.85 MPa Setting
Drain Cock w/Barb Fitting	None
Port Size	02 (1/4)
Exhaust Mechanism	Relieving
Backflow Function	None
Flow Direction	Left to Right
Bowl	Polycarbonate Bowl
Thread	Rc
Pressure medium	Air
Maximum temperature of pressure medium	60 °C
Minimum temperature of pressure medium	-5 °C (with no freezing)
Maximum ambient temperature	60 °C
Minimum ambient temperature	-5 °C (with no freezing)
Grade of filtration	5 µm
Weight	0.205 Kg

Dimensions

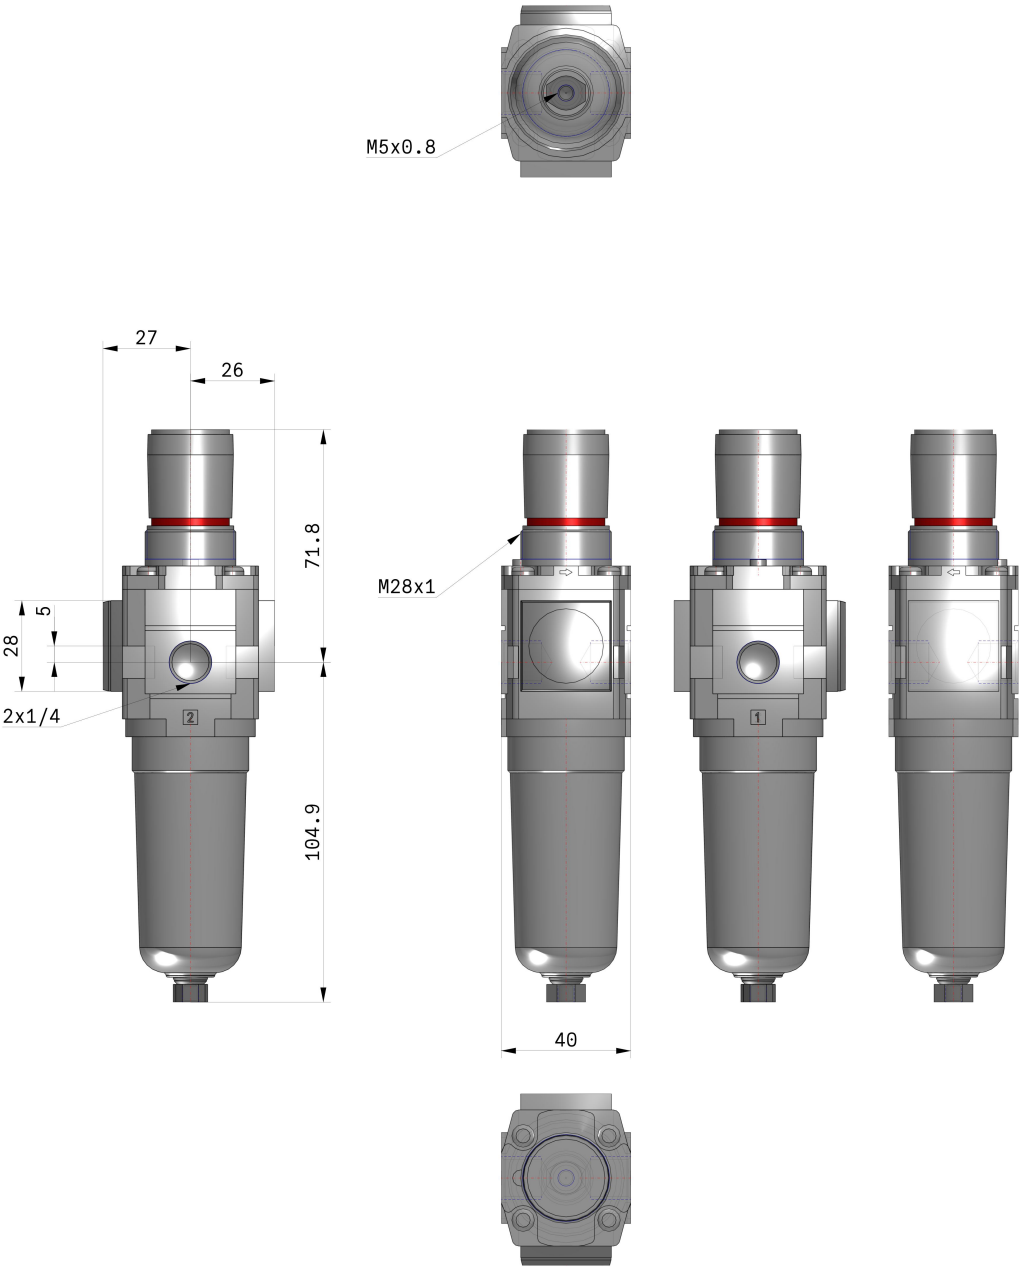

Additional information

Catalogue

[AC-D-D_EU.pdf](#)

Operation manuals

[OM_AW-D_OMX0057EN-DE.pdf](#)