



C96Y(D), ISO 15552 Cylinder, Smooth Cylinder, Double Acting, Single Rod C96YDB63-600C

Datasheet

General series information

- Double acting, Smooth Cylinder, single rod
- Bore sizes (mm): 32, 40, 50, 63, 80, 100
- Standard stroke up to 500mm, maximum stroke 1000mm
- Auto switch capable




Double-acting, single-rod cylinder

Standard specifications

Magnet	D (Built-in Magnet)
Mounting	B (Basic, w/o Bracket)
Bore Size	Ø63 mm
Stroke	600
Auto Switch	No Switch
Lead Wire or Pre-wired Connector	0.5 m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in the Case of No Switch)
Rod End Options	None
Pressure medium	Compressed air
Maximum temperature of pressure medium with magnet	60 °C
Minimum temperature of pressure medium with magnet	-10 °C (no freezing)
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.01 MPa
Proof pressure	1.05 MPa
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature with magnet	-10 °C (no freezing)
Number of pneumatic connections	2 pcs.
Pneumatic input connection	G 3/8
Pneumatic exhaust connection	G 3/8

Mode of operation of drive	Double acting
Maximum piston speed	500 mm/s
Type of cushioning	Bumper cushion
Piston rod end	Male-thread
Geometric form of the piston rod	Single rod
Male thread of rod end	M16 x 1.5
Minimum piston speed	50 mm/s
Weight	4.719 Kg

Dimensions

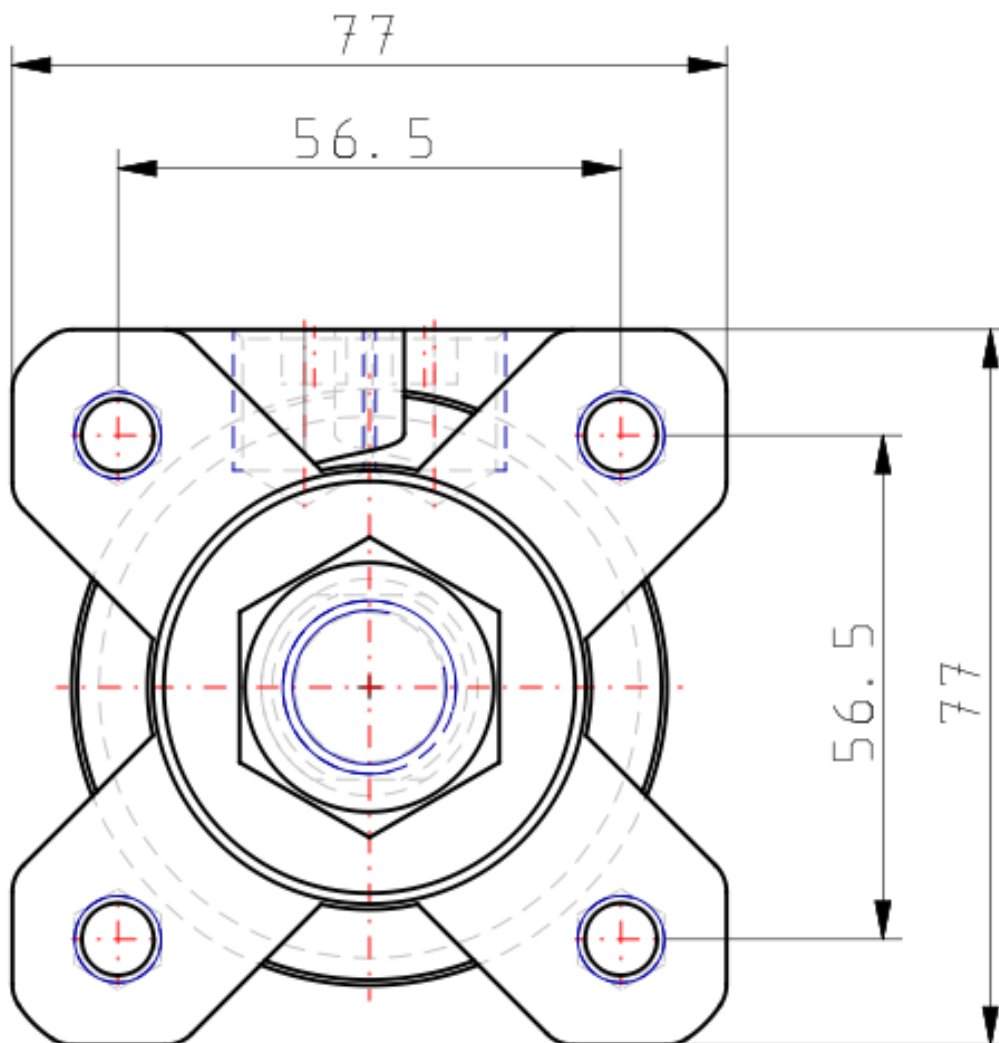

Additional information

Catalogue

[C96-Bb_EU.pdf](#)