


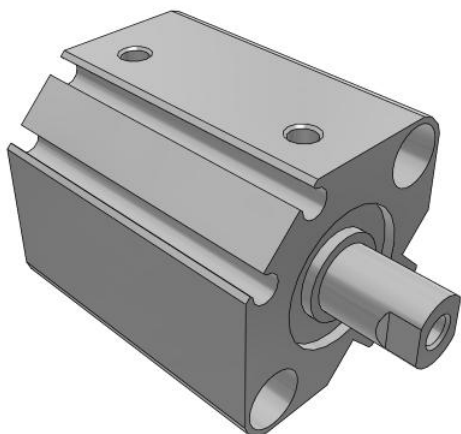

C(D)Q2W, Compact Cylinder, Double Acting Double Rod w/Auto Switch Mounting Groove CDQ2WB20-10DZ

Datasheet

General series information


- Double acting, double rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Low Speed	None
Stroke	10 mm
Magnet	D (Built-in)
Rod End Options	None
Made of Stainless Steel	None
Lead Wire or Pre-wired Connector	0.5 m (Or None in the Case of No Switch)
Auto Switch	No Switch
Mounting	B (Through Hole [Standard])
Bore Size	Ø20 mm
Type	Standard
Fluororubber Seal	None
Number	2 pcs. (Or None in the Case of No Switch)
Auto Switch Groove	Z (Auto Switch Mounting Grooves)
Port Thread	Rc (or M Thread for 16 and 20 Bore or 32 stroke 5 mm)
Temperature Resistance	None
Body Option	Standard (Rod End Female Thread)
Pressure medium	Compressed air
Number of pneumatic connections	2 pcs.

Mode of operation of drive	Double acting
Weight	0.104 Kg

Dimensions

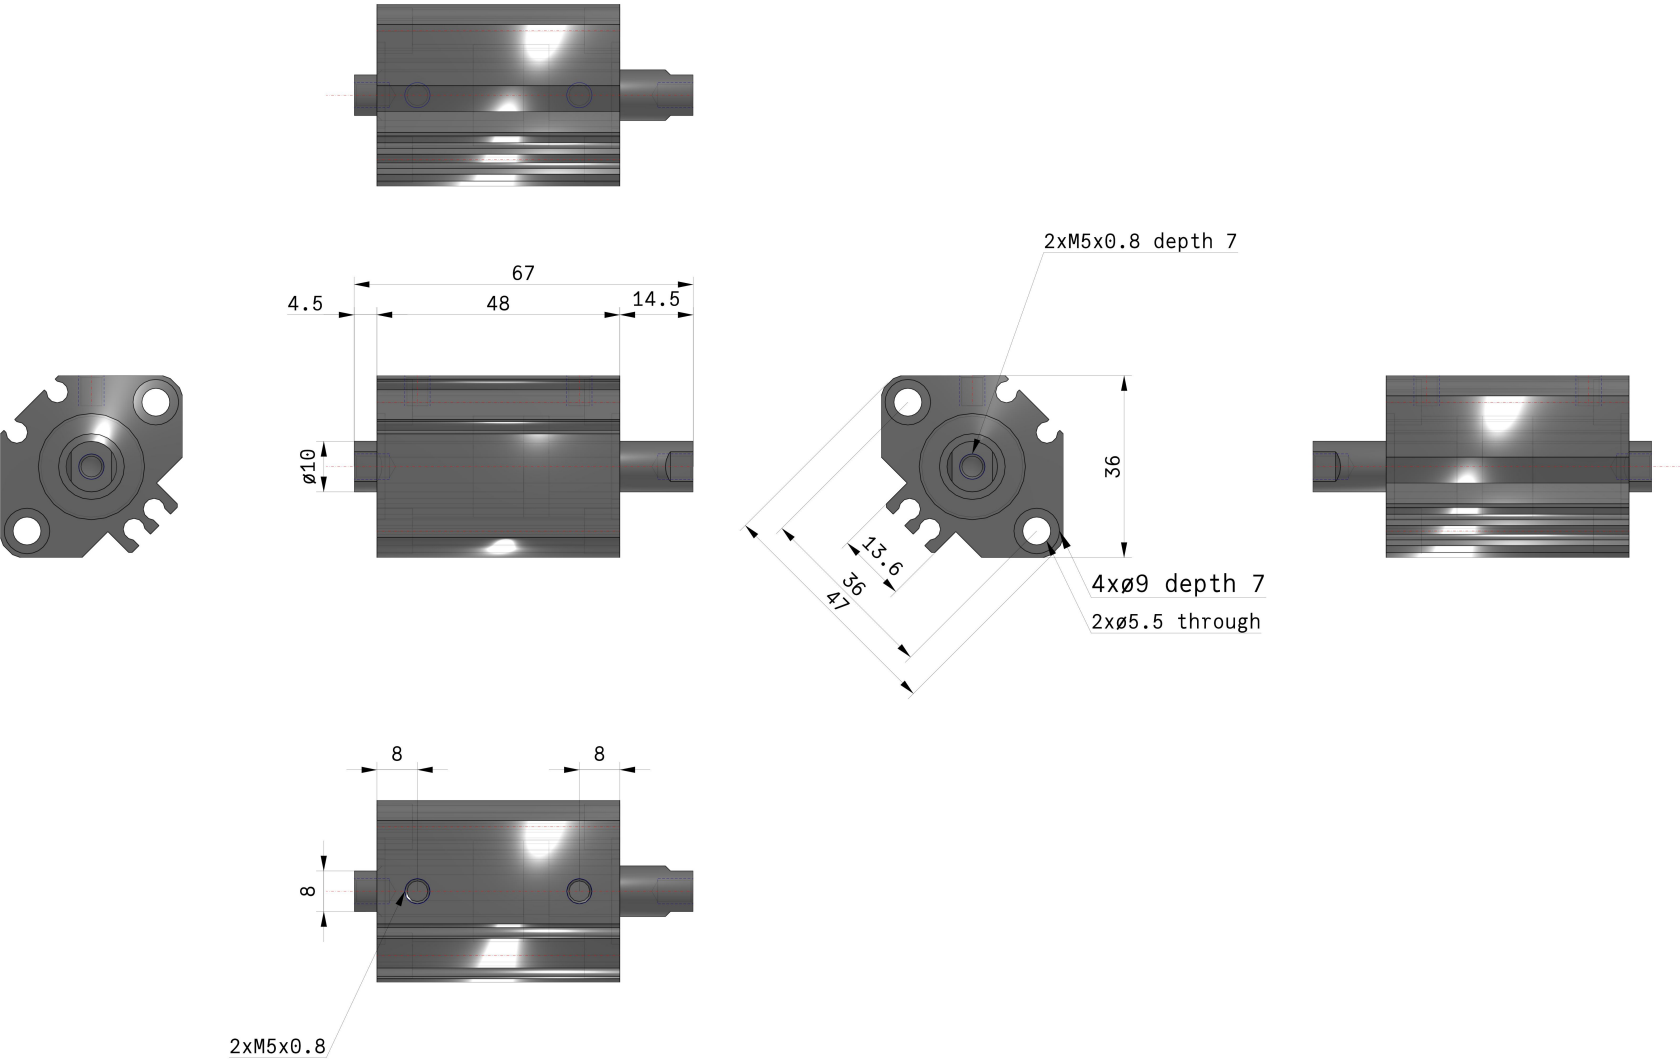

Additional information

Catalogue

[CQ2-Z-D_EU.pdf](#)

Operation manuals

[OM_CQ2x_OM0002MEN.pdf](#)