


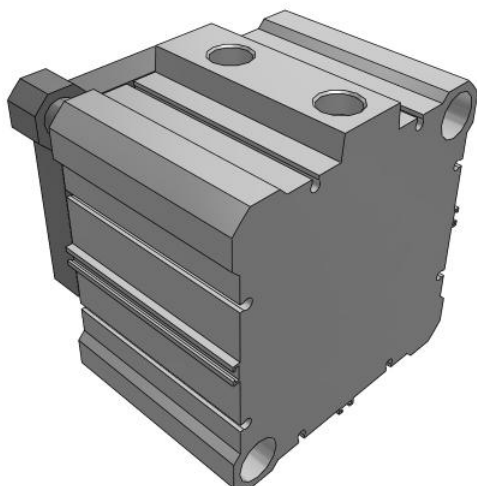

## C(D)QM (ø12 to ø32), Compact Cylinder, Guide Rod Type CDQMB100TF-20

Datasheet


### General series information

- Guide rod type compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32
- Standard strokes (mm): 5 to 100
- 4 times the lateral load resistance of the CQ2K
- Non-rotating accuracy 0.2 or less

### Standard specifications

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Mounting                         | B [Through Hole (Standard)]              |
| Bore Size                        | Ø100 mm                                  |
| Stroke                           | 20 mm                                    |
| Number                           | 2 pcs. (Or None in Case of No Switch)    |
| Magnet                           | D (Built-in)                             |
| Port Thread                      | TF [G]                                   |
| Lead Wire or Pre-wired Connector | 0.5 m (Or None in the Case of No Switch) |
| Auto Switch                      | No Switch                                |
| Pressure medium                  | Compressed air                           |
| Number of pneumatic connections  | 2 pcs.                                   |
| Weight                           | 2.950 Kg                                 |

Dimensions

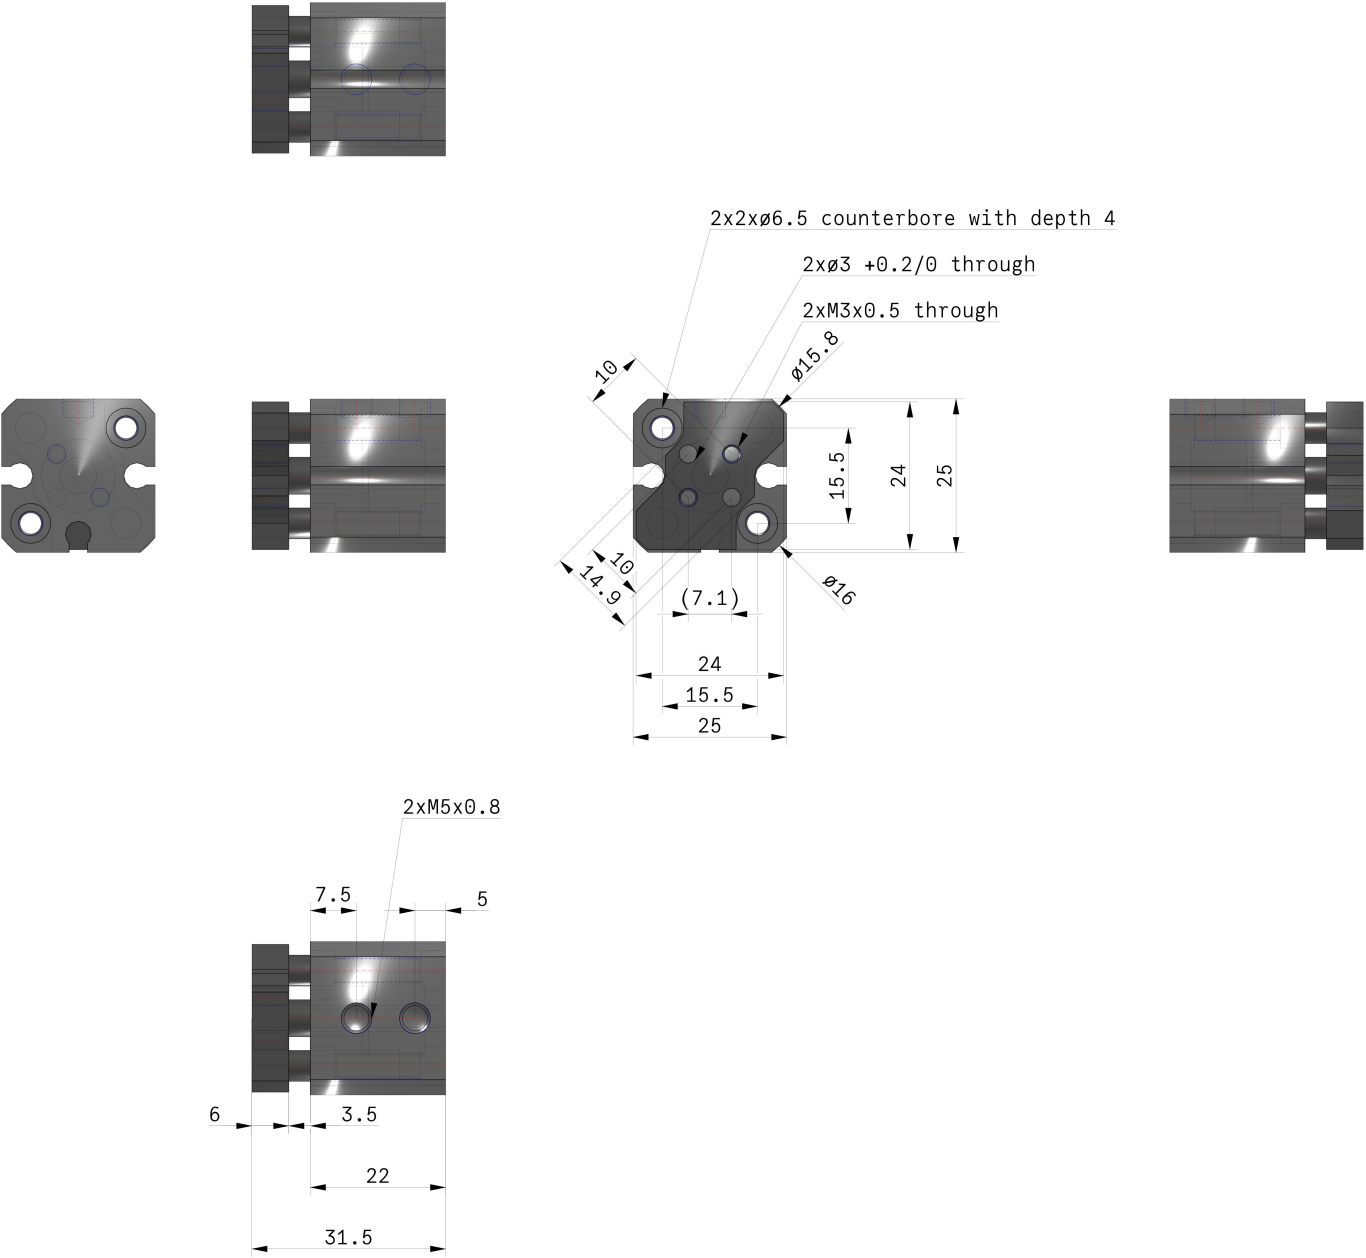

## Additional information

Catalogue

[CQM\\_EU.pdf](#)

Operation manuals

[cqm\\_op\\_manual\\_cqm\\_-om0001c.pdf](#)