


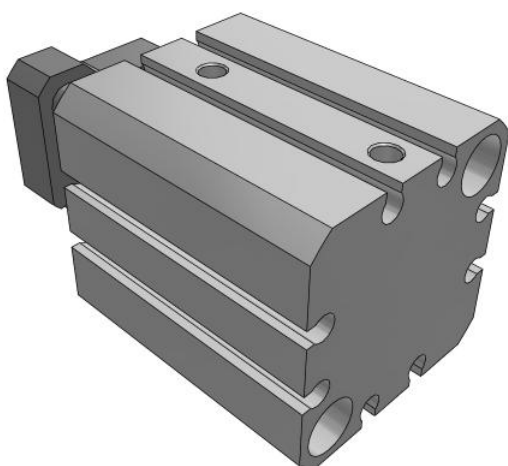

## C(D)QM (ø12 to ø32), Compact Cylinder, Guide Rod Type CDQMB25-15







Datasheet

### General series information

- Guide rod type compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32
- Standard strokes (mm): 5 to 100
- 4 times the lateral load resistance of the CQ2K
- Non-rotating accuracy 0.2 or less

### Standard specifications

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Mounting                         | B [Through Hole (Standard)]           |
| Bore Size                        | Ø25 mm                                |
| Stroke                           | 15                                    |
| Number                           | 2 pcs. (Or None in Case of No Switch) |
| Magnet                           | D (Built-in)                          |
| Port Thread                      | M Thread; Rc                          |
| Lead Wire or Pre-wired Connector | 0.5 m                                 |
| Auto Switch                      | No Switch                             |
| Pressure medium                  | Compressed air                        |
| Number of pneumatic connections  | 2 pcs.                                |
| Weight                           | 0.205 Kg                              |

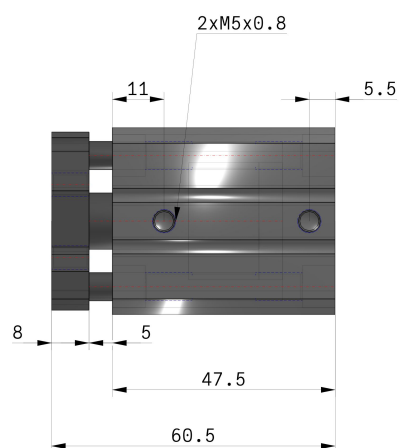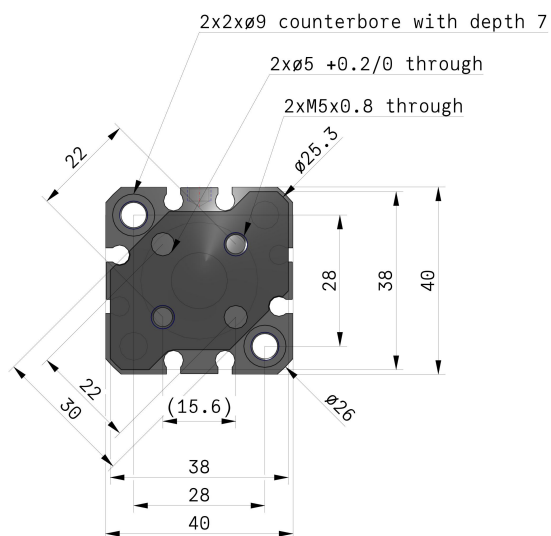

## Additional information

Catalogue

[CQM\\_EU.pdf](#)

Operation manuals

[cqm\\_op\\_manual\\_cqm\\_-om0001c.pdf](#)