


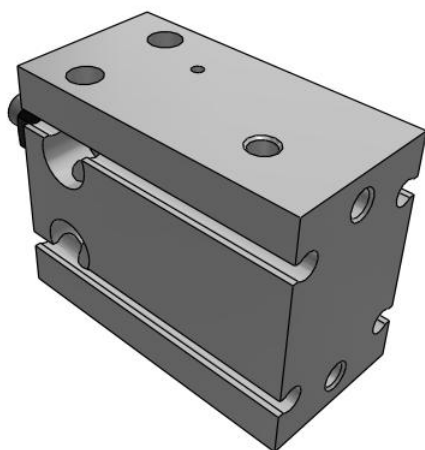


## C(D)U, Free Mount Cylinder, Single Acting CDU20-5S

### Datasheet

### General series information

- Bore sizes from 6mm to 32mm available
- Stroke lengths up to 15mm
- Spring return, spring extend
- Space saving
- Auto-switch capable




Single-acting cylinder, single piston rod, return stroke by spring

### Standard specifications

|                                                         |                                           |
|---------------------------------------------------------|-------------------------------------------|
| Magnet                                                  | D (Built-in Magnet)                       |
| Bore Size                                               | 20 mm                                     |
| Port Thread                                             | M5x0.8; Rc1/8 for ø32                     |
| Stroke                                                  | 5 mm                                      |
| Action                                                  | S (Single Acting Spring Return)           |
| Auto Switch                                             | No Switch                                 |
| Lead Wire or Prewired Connector                         | 0.5 m (Or None in the Case of No Switch)  |
| Number                                                  | 2 pcs. (Or None in the Case of No Switch) |
| Maximum operating pressure                              | 0.7 MPa                                   |
| Minimum operating pressure                              | 0.13 MPa                                  |
| Proof pressure                                          | 1.05 MPa                                  |
| Theoretical cylinder force, advance stroke (at 0.5 MPa) | 136 N                                     |
| Type of cushioning                                      | Rubber Bumper                             |
| Piston rod end                                          | Male Thread                               |
| Lubrication                                             | Non-lube                                  |
| Fluid                                                   | Air                                       |
| Ambient and fluid temperature                           | -10 - 60 °C                               |
| Stroke length tolerance                                 | 0+1.0 mm                                  |


|                  |               |
|------------------|---------------|
| Thread Tolerance | JIS Class2    |
| Piston speed     | 50 - 500 mm/s |
| Weight           | 0.095 Kg      |

Dimensions

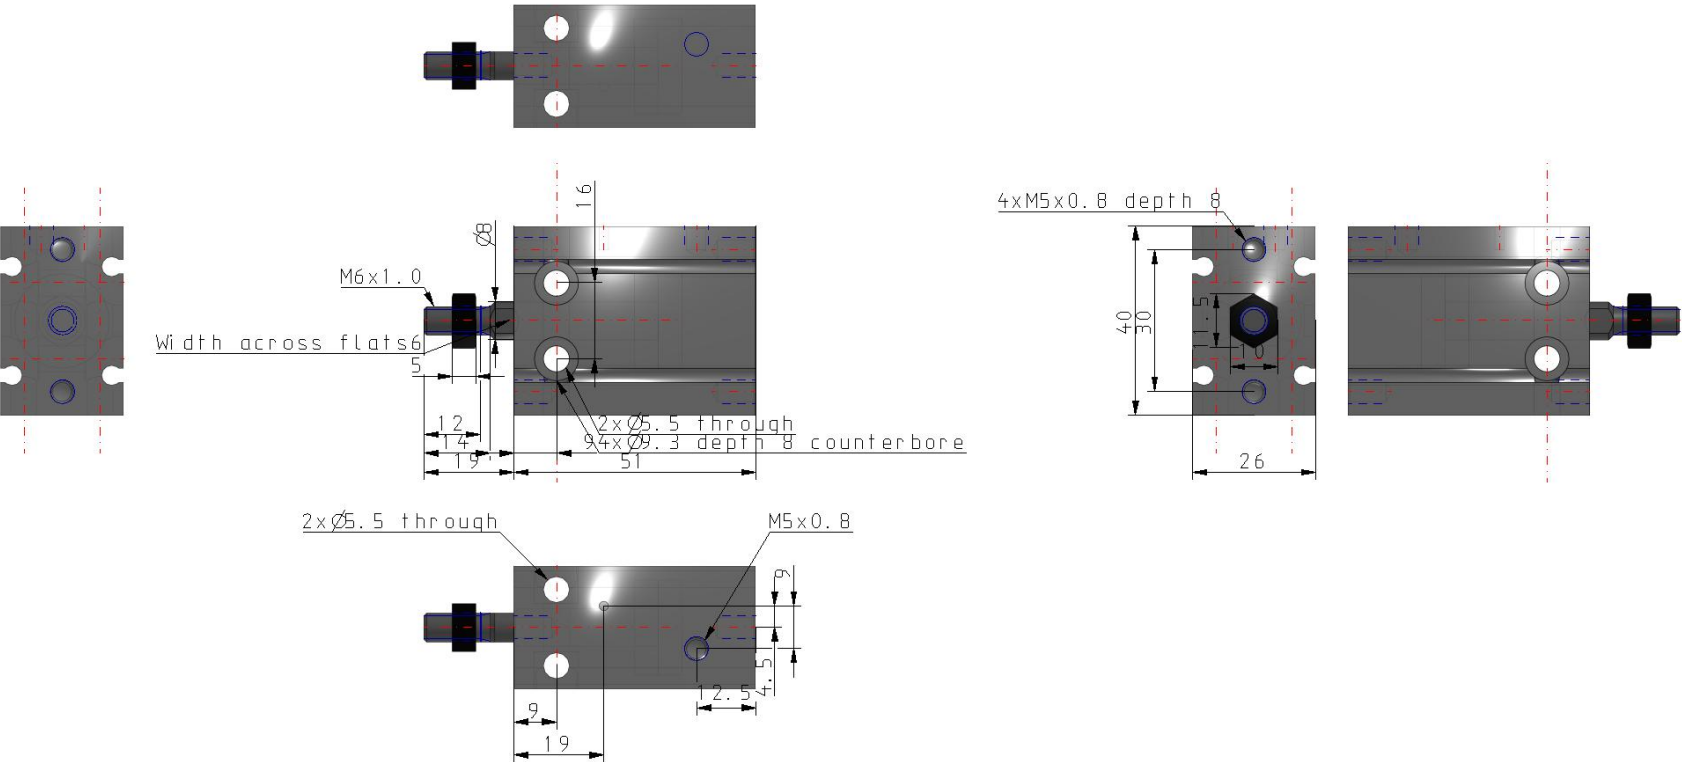

# Constructions

ø16 to ø32 With auto switch

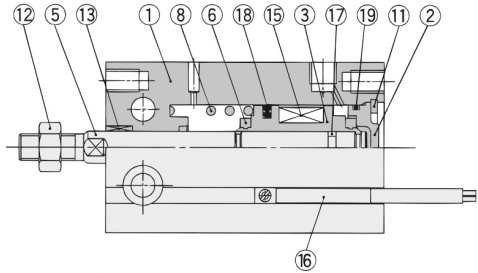

## Component Parts

| No. | Description   | Material        | Note                                 |
|-----|---------------|-----------------|--------------------------------------|
| 1   | Cylinder tube | Aluminum alloy  | Hard anodized                        |
| 2   | Head cover    | Brass           | ø6 to ø10, Electroless nickel plated |
|     |               | Aluminum alloy  | ø16 to ø32, Clear chromated          |
| 3   | Piston        | Brass           | ø6 to ø10                            |
|     |               | Aluminum alloy  | ø16 to ø32, Chromated                |
| 4   | Piston        | Brass           | ø10                                  |
| 5   | Piston rod    | Stainless steel |                                      |
| 6   | Bumper A      | Urethane        |                                      |
| 7   | Bumper B      | Urethane        |                                      |
| 8   | Return spring | Piano wire      | Zinc chromated                       |

## Component Parts

| No. | Description   | Material                       | Note             |
|-----|---------------|--------------------------------|------------------|
| 9   | Spring seat   | Brass                          |                  |
| 10  | Spring seat   | Brass                          |                  |
| 11  | Snap ring     | Carbon tool steel              | Phosphate coated |
| 12  | Rod end nut   | Carbon steel                   | Nickel plated    |
| 13  | Bushing       | Oil-impregnated sintered alloy |                  |
| 14  | Magnet holder | Brass                          | ø6               |
| 15  | Magnet        | Magnetic material              |                  |
| 16  | Auto switch   | —                              |                  |
| 17  | Piston gasket | NBR                            |                  |
| 18* | Piston seal   |                                |                  |
| 19* | Gasket        |                                |                  |

## Additional information

Catalogue

[CU\\_B\\_EU.pdf](#)

Operation manuals

[OM\\_CU\\_OM0002EN-A.pdf](#)