


Air Management Hub – EXA1 EXA1-40-PN-KL

Datasheet

General series information

- Compatible with Ethernet, Profinet and EtherCAT
- Wireless base or remote function
- IO-link compatible.




Air management hub

Standard specifications

Body Size	40
Protocol	PN [PROFINET, OPC UA (When Wireless Adapter is Connected: Wireless Base)]
Units	K (Units Selection Function)
Pressure medium	Air
Maximum temperature of pressure medium	50 °C
Minimum temperature of pressure medium	0 °C
Proof pressure	1.5 MPa
Maximum ambient temperature	50 °C
Minimum ambient temperature	0 °C
General power supply	24 VDC ±10 %
Conform to the European RoHS Directive	Conform
Approvals	CE, UKCA
Protection class without connector	IP65
Output type	PNP
Current consumption	400 mA
Repeatability	Flow: ±1.0 % F.S. Pressure: ±1.0 % F.S.
Rated pressure range	0 - 1.0 MPa
Max. Flow rate (l/min (ANR))	2000 l/min
Accuracy	Flow: ±3.0 % F.S. Pressure: ±3.0 % F.S. Temperature: ±2.5 °C (Flow range:10 % to 100 %)

Indicator light	LED & LCD
Temperature characteristics	Flow: ± 5.0 % F.S. (0 to 50 °C, 25 °C standard) Pressure: ± 5.0 % F.S. (0 to 50 °C, 25 °C standard)
Smallest settable increment Accumulated flow	10 l
Pressure characteristics	± 5.0 % F.S. (0 to 1.0 MPa, 0.5 MPa standard)
Electrical protection	Polarity protection, Over current protection
Accumulated flow range	0 - 9,999,999,990 l
F467 - Input type	PNP
settable_increment_inst	2 l/min
Weight	0.810 Kg

Dimensions

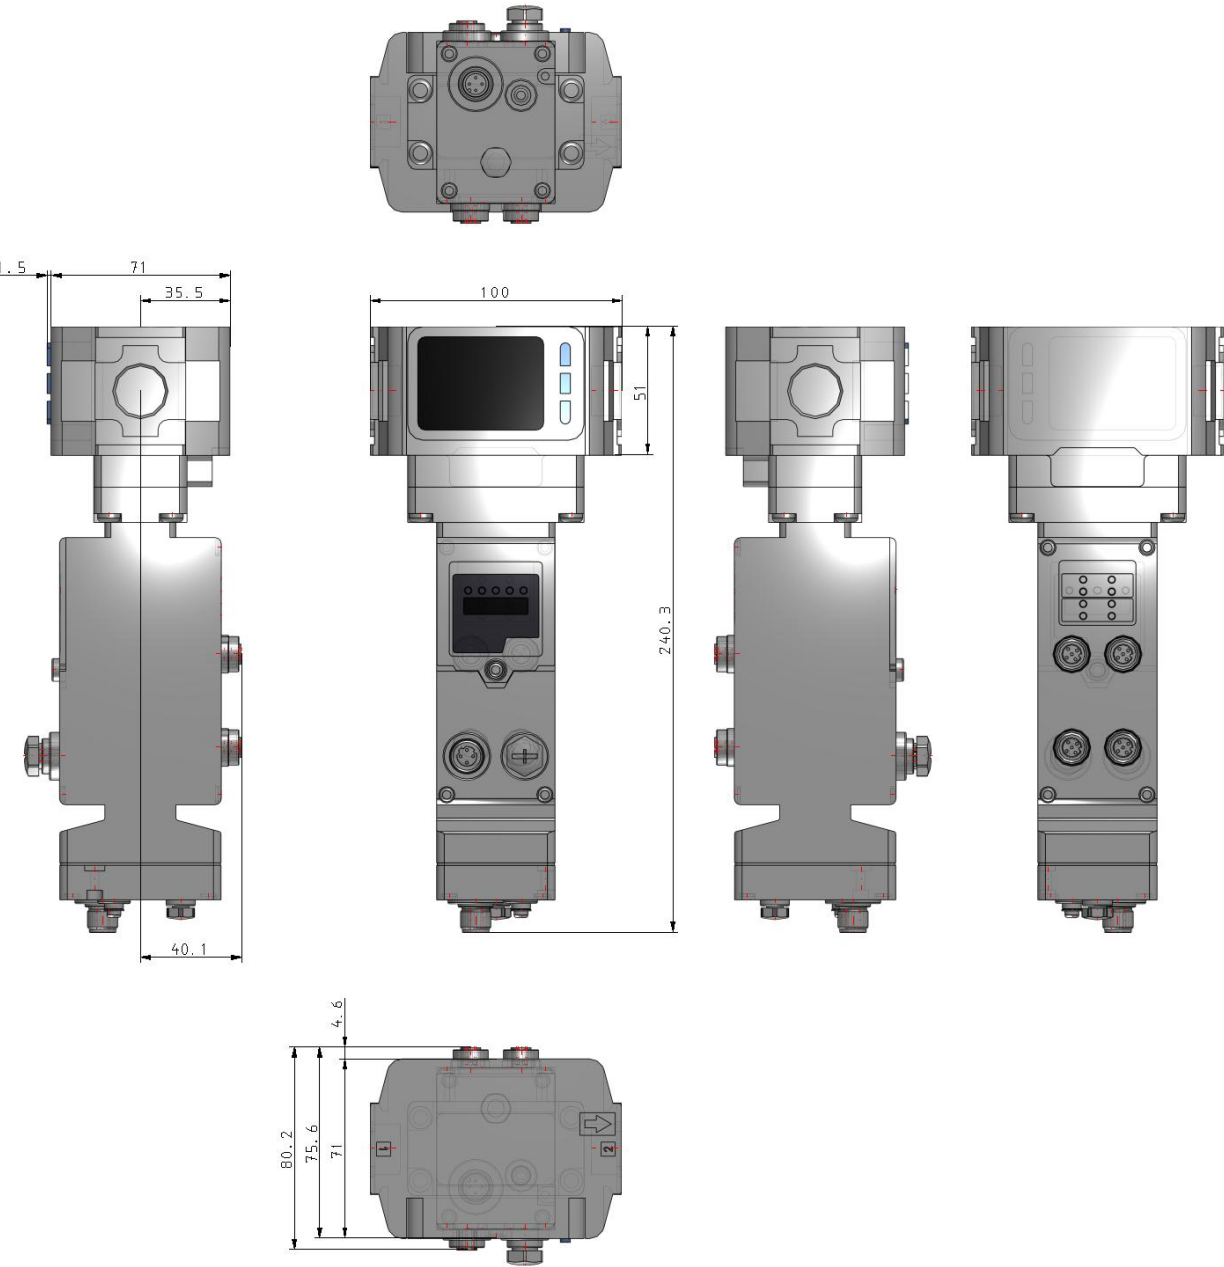

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Additional information

Catalogue	AMS-Da_EU.pdf
Declaration of conformity	newDoC_AMS20-30-40-60_TF125-177EN.pdf newDoC_PF_TF122129EN.pdf
Installation manuals	IM_AMS_TF223-005EN-A.pdf IM_EXA1_TF222-139EN-B.pdf IM_EXW1-A11N-X1_TF222-092EN-A.pdf
Operation manuals	OM_AMS_20-30-40-60_OMA1007EN-G.pdf AMS_Retrofitting_Guide_EN.pdf