


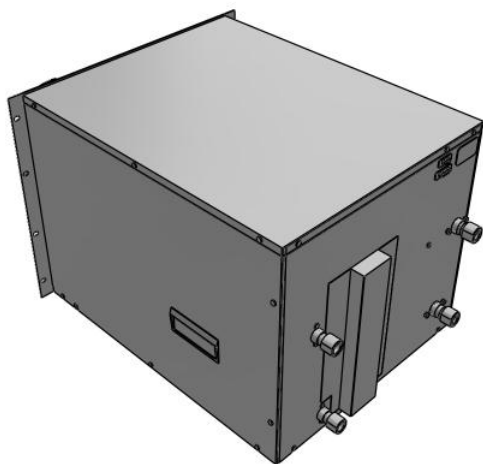

Circulating Fluid Temperature Controller, Rack Mount Type, 230VAC - HRR HRR030-WF-20-U

Datasheet

General series information


- Cooling capacity: 0.95 to 5 kW (50 Hz)
- Temperature stability: $\pm 0.1^{\circ}\text{C}$
- Set temperature range: 5 to 35 $^{\circ}\text{C}$; 15 to 35 $^{\circ}\text{C}$ (HRR010)
- Space Saving
- With heating function and self-diagnosis.

Standard specifications

Cooling Capacity	030 [2500/3000, (50/60 Hz)]
Cooling Method	W (Water-cooled)
Pipe Thread	F (G, w/Rc-G Conversion Fitting)
Power Supply	20 [Single-phase 200 to 230 VAC (50/60 Hz)]
DI Water Piping	None
High-pressure Pump Mounted	None
Suffix	U (Conforming to UL Standards)
Feet	None
Flow Sensor	None
Maximum ambient temperature	40 $^{\circ}\text{C}$
Minimum ambient temperature	5 $^{\circ}\text{C}$
Approvals	CE
Power supply	Single-phase 200 to 230 VAC (50/60 Hz)
Port size	G 1/2
Cooling method	Water-cooled refrigeration
Refrigerant	R410A (HFC)
Control method	PID control
Circulating fluid	Tap water, 15% ethylene glycol aqueous solution

Set temperature range	5 - 35 °C
Cooling capacity (50 Hz)	2500 W
Heating capacity (50 Hz)	550 W
Temperature stability	± 0.1 °C
Tank capacity	4 L
Contact material for circulating fluid	Stainless steel, Copper (Heat exchanger brazing), Brass, SiC, Alumina ceramic, Carbon, PP, PE, POM, PA, FKM, EPDM, PVC, PPS, AS, Fluoropolymer, Ion exchange resin
Facility water temperature range	5 - 40 °C
Facility water pressure range	0.3 to 0.5 MPa
Facility water required flow range (50 Hz)	15 l/min
Facility water port size	G 3/8
Contact material for facility water	Stainless steel, Copper (Heat exchanger brazing), Bronze, Brass, Synthetic rubber
Noise level (50 Hz)	61 dB
Rated power consumption (50 Hz)	0.8 kW
Pump rated flow (50 Hz)	7 l/min
Circulating fluid port size	G 1/2
Tank drain port	G 1/4
Weight	45.000 Kg

Dimensions

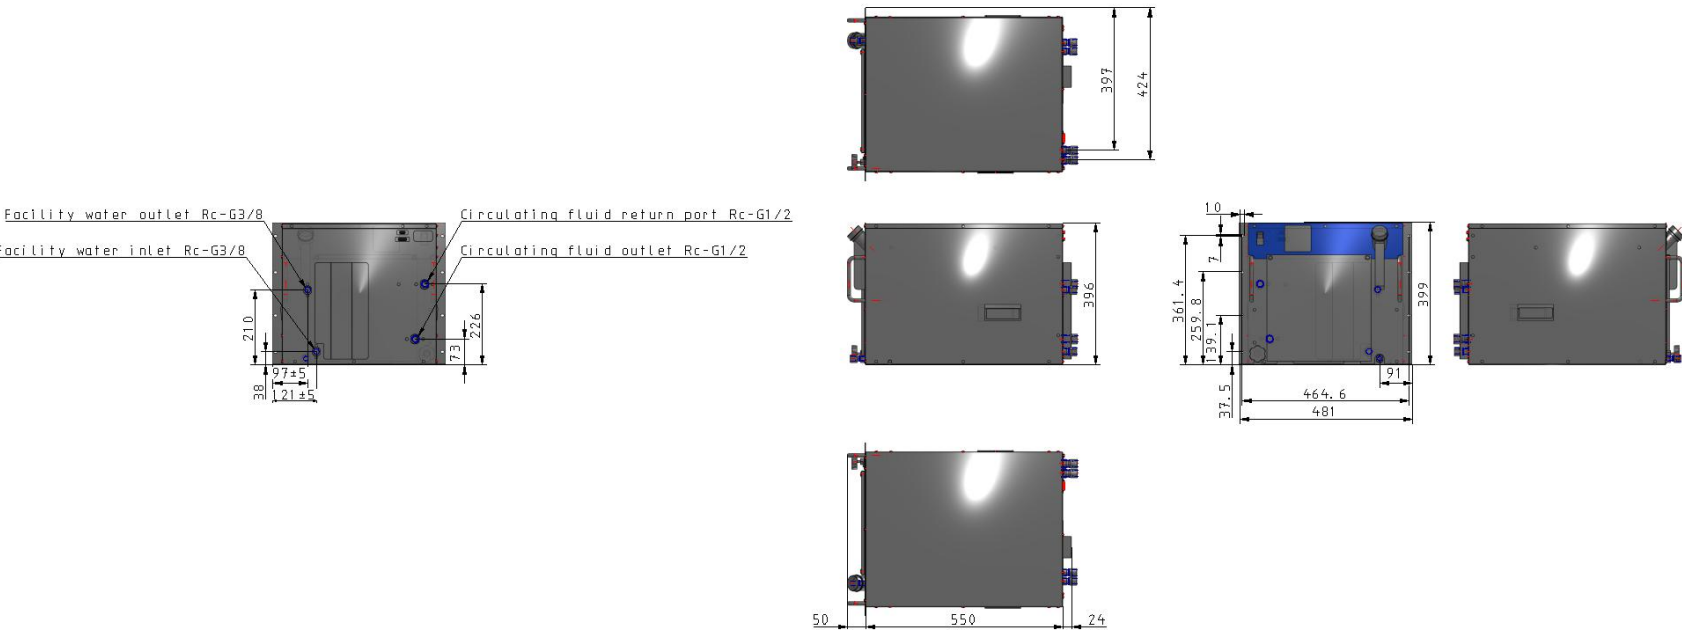

Additional information

Catalogue	HRR-D_EU.pdf
Declaration of conformity	newDoC_HRR_TF1W10EN.pdf newDoC_HRR_TF125-045EN.pdf newDoC_HRR-TF1Y309EN-B.pdf
Installation manuals	IM_HRR_SMW56EN-C.pdf IM_HRR050_SMY61EN-B.pdf IM_HRR010_SMY36EN-B.pdf
Operation manuals	OM_HRR_OM-Y057EN-A.pdf OM_HRR50_OM-X071EN-G.pdf OM_HRR_W004EN-I.pdf OM_HRRx_OM-W002EN-N.pdf OM_HRR010_EN-E.pdf OM_HRR_OM-X084EN-I.pdf