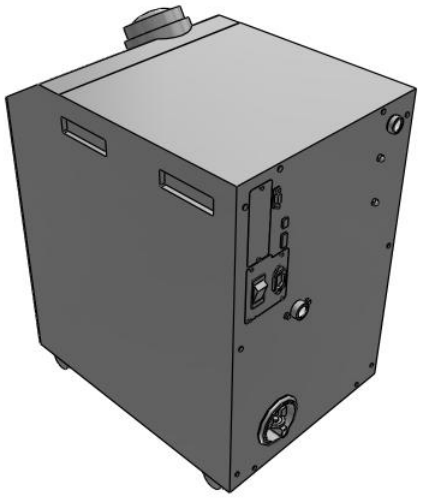

HRS, Thermo-chiller, Compact Type
HRS018-A-20-MT

Datasheet

General series information

- Compact and lightweight.
- Temperature stability ± 0.1 ºC.
- Improved maintenance performance.
- Heating function available even with no heater.

Standard specifications

Cooling Capacity	018 [Cooling capacity: 1500/1700 W (10) - 1700/1900 W (20) (50/60 Hz)]
Cooling Method	A (Air-cooled Refrigeration)
Thread	Rc
Power Supply	20 [Single-phase 200 to 230 VAC (50/60 Hz)]
Earth Leakage Breaker	None
High ambient temperature	None
Automatic fluid fill	None
DI Water Piping	M (Applicable to Deionized Water Piping)
High-pressure pump	T (High-Lift Pump)
Units	None
Maximum ambient temperature	40 °C
Minimum ambient temperature	5 °C
Approvals	CE
Power supply	Single-phase 200 to 230 VAC (50/60 Hz)
Cooling method	Air-cooled refrigeration
Refrigerant	R407C (HFC)
Control method	PID control
Circulating fluid	Deionised water

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com

Set temperature range	5 to 40 °C
Cooling capacity (50 Hz)	1700
Heating capacity (50 Hz)	530
Temperature stability	± 0,1
Tank capacity	5 L
Contact material for circulating fluid	Stainless steel (including heat exchanger brazing), Alumina ceramic, SiC, Carbon, PP, PE, POM, FKM, NBR, EPDM, PVC
Rated operating current (50 Hz)	4.7 A
Rated power consumption (50 Hz)	0.9 kVA
Pump rated flow (50 Hz)	10 l/min (0.32 MPa)
Pump maximum flow rate (50 Hz)	18 l/min
Maximum pump head (50 Hz)	60 m
Circulating fluid port size	1/2
Noise level	60 dB
Weight	49.000 Kg

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com

Dimensions

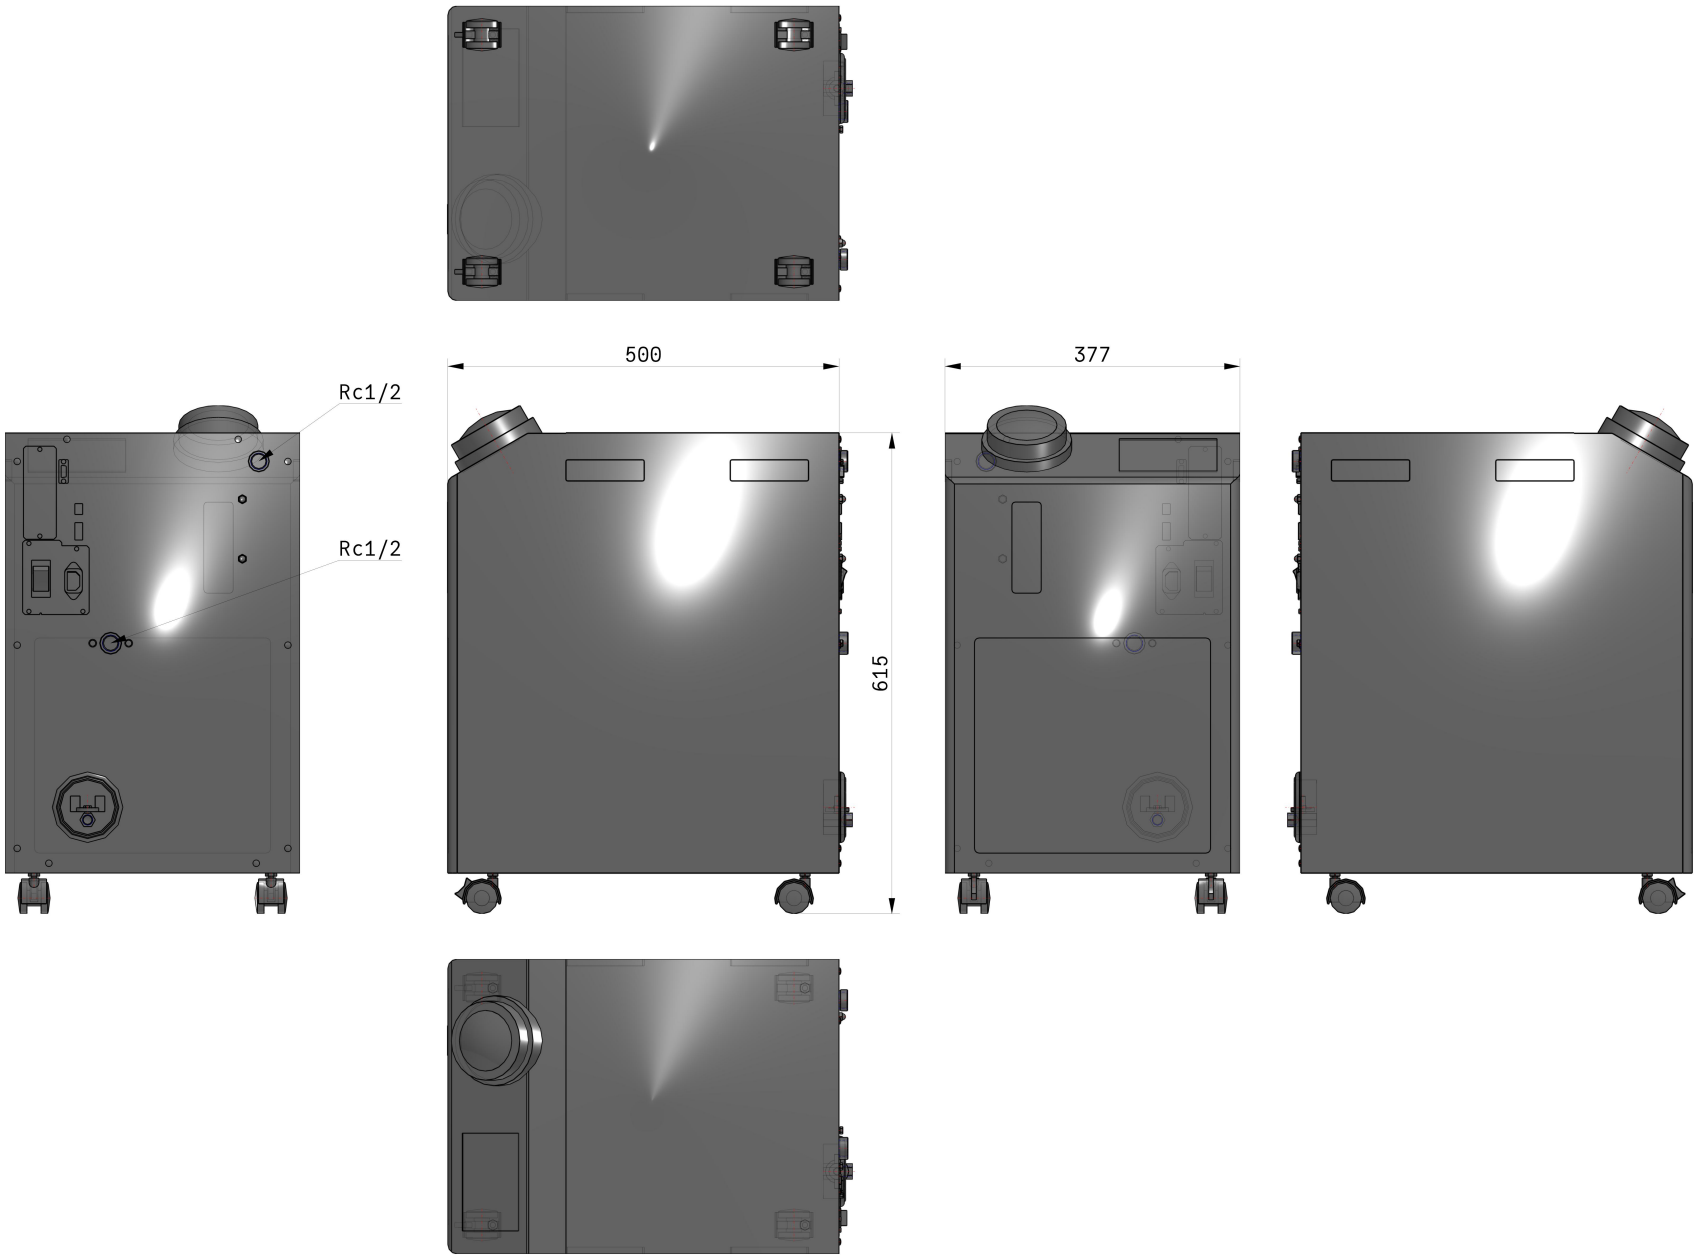

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com

Additional information

Catalogue	HRS-G_EU.pdf
Declaration of conformity	newDoC_HRS_TF125-047EN.pdf newDoC_HRS_TF-T018EN.pdf DoC_HRS_TF-S043.pdf newDoC_HRS_TF1V336EN.pdf DoC_HRSx_TF-O027.pdf newDoC_HRS_TF1Y298EN-D.pdf
Installation manuals	IM_HRS040_SMX145EN-A.pdf IMM_HRS_TFR02EN-A.pdf IM_HRSF012_018_024_030_050_060_TF224-064EN-B.pdf
Operation manuals	OM_DI-filter-set_HRS012-018-024_EN.pdf OM_HRSF_DOC1093921EN.pdf OM_HRSF_DOC1053240EN-1.pdf OM_HRS040_EN-F.pdf OM_Bypass-piping-set_HRS012-018-024_EN.pdf OM_HRS060_EN-N.pdf OM_HRS12-018-024_OM-M090EN-H.pdf OM_HRS030_EN-O.pdf OM_HRSF_DOC1053228EN-2.pdf OM_HRS050_EN-V.pdf OM-Communication_HRS012-018-024-030-040-050-060_EN-P.pdf QuickManual_HRS_M085EN-F.pdf

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com