

IZS40/41/42
IZS42-1120CP-06B

Datasheet

General series information

- IZS40: Basic type (AC, DC) / IZS41: High speed (AC, Sensing AC, DC) / IZS42: Dual AC type.
- Controller integrated in the bar.
- Autobalance sensor, feedback sensor.
- Wireless remote control.
- Transition wiring for ionizers serial connection.
- Display and warning alarms.

Standard specifications

Type	42 (Dual AC type)
Bar Length	1120mm
Electrode Needle Material	C [High speed de-ionizing cartridge (Silicon)]
Output	P (PNP)
Power Supply Cable	3m
One-touch fitting	06
Bracket	B (With Bracket)
Sensor	Type 40: N/A; Type 41 and 42: Built-in Auto Balance Sensor
Option	None
Maximum operating pressure	0.5 MPa or less
Proof pressure	0.7 MPa
Maximum ambient temperature	40 °C
Minimum ambient temperature	0 °C
Approvals	CE
Power supply	24 VDC ±10%
Current consumption	700 mA or less

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.


SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com

Material	Body cover: ABS, Emitter cartridge: PBT, Emitter: Tungsten, Single crystal silicon
Applicable fluid	Air (Clean dry air)
Ion generation method	Corona discharge type
Method of applying voltage	Dual AC
Applied voltage	±6000 V
Ambient humidity	35 to 80% RH (No condensation)
Offset voltage	Within ±30 V
Effective static neutralization distance	50 to 2000 mm
Weight	1.490 Kg

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com


Dimensions

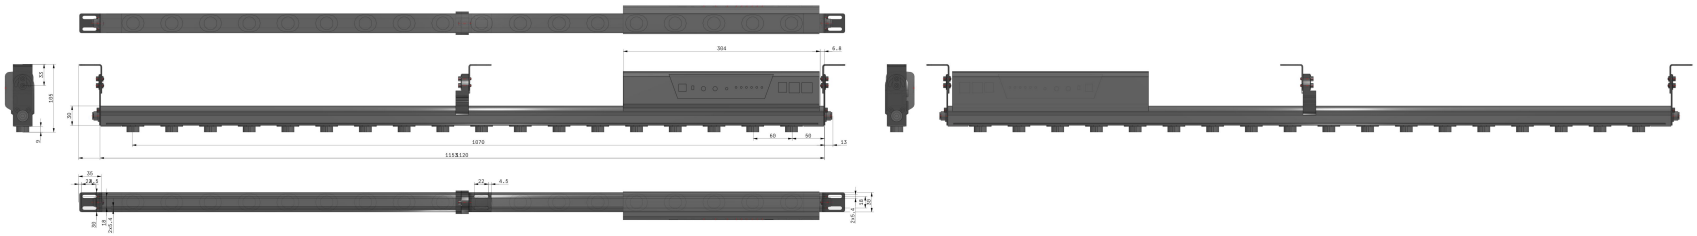

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com

Constructions

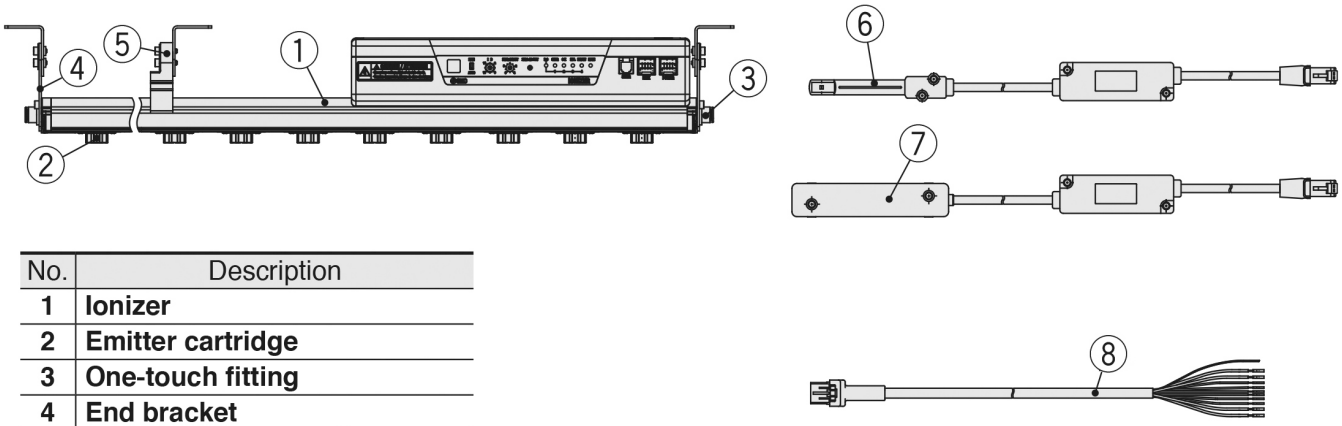

No.	Description
1	**Ionizer**
2	**Emitter cartridge**
3	**One-touch fitting**
4	**End bracket**
5	**Intermediate bracket**
6	**Feedback sensor**
7	**Auto balance sensor [High accuracy type]**
8	**Power supply cable (for IZS41, 42)**

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com

Additional information

Catalogue	IZS40_41_42-C_EU.pdf
Declaration of conformity	newDoC_IZS4_TF1V243EN.pdf DoC_IZS4x_TDQ0038.pdf newDoC_IZS_TF122010EN.pdf
Installation manuals	IM_IZS4_TF2Z271EN.pdf
Operation manuals	OM_IZS4_OMP0064EN-F.pdf

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu support.marketingeurope@smc.com