

## KK\*P-\*F, S-Couplers, Female Thread KK4P-02F

**Datasheet** 

### **General series information**

• Female Thread.

• Body size: M5, 1/8, 1/4, 1/2.

• Applicable Port Size: M5, Rc1/8, Rc1/4, Rc3/8, Rc1/2.


# **Standard specifications**


Piping Port Size	Rc 1/4
Body Size	4 (1/4)
Pressure medium	Air, Water
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0 kPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C / 40 °C for Water
Minimum ambient temperature	-5 °C (with no freezing) / 5 °C for Water
Effective Area	39 mm²
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Weight	0.023 Kg

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

# Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

# **Dimensions**

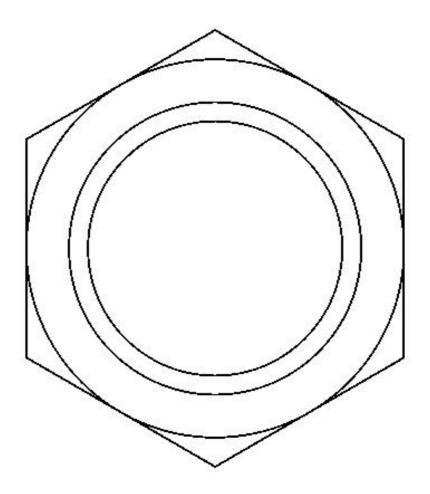

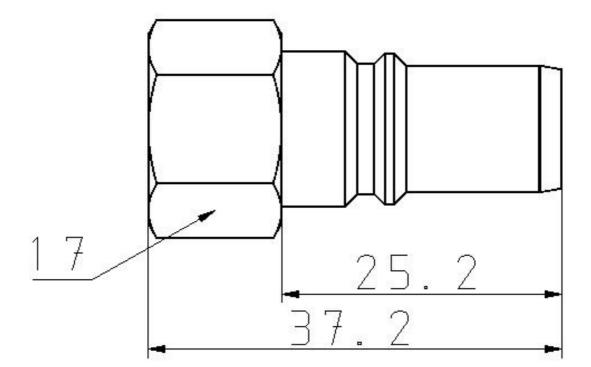



# **Additional information**

Catalogue

KK-C\_EU.pdf

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.