


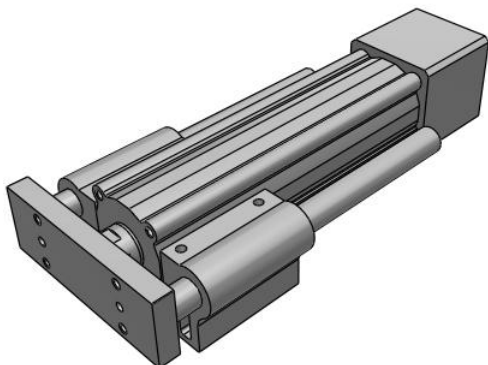

Standard Type - LEYG LEYG32MDNZA-100







Datasheet

General series information

- Body size: 25 and 32 mm.
- Stroke: 30 to 300 mm.
- Compatible with several motors: OMRON, Siemens AG, Beckhoff automation and more.

Standard specifications

Accuracy	Basic Type
Size	32
Bearing Type	M (Slide Bearing)
Motor Mounting Position	D (In-line)
Motor Type	NZ (Mounting Type Z)
Lead Screw	A [LEYG25, 12mm; LEYG32, 16mm, (20)]
Stroke	100 mm
Guide Option	Without Option
Pushing speed	30 mm/s or less
Impact/Vibration resistance	50/20 m/s ²
Horizontal work load	10 kg
Vertical work load	10 kg
Max. Acceleration/deceleration	5000 mm/s ²
Positioning repeatability	± 0.02 mm
Lost motion	0.1 max.
Max. speed	1000 mm/s
Pushing force	98 - 197 N
Weight	3.110 Kg

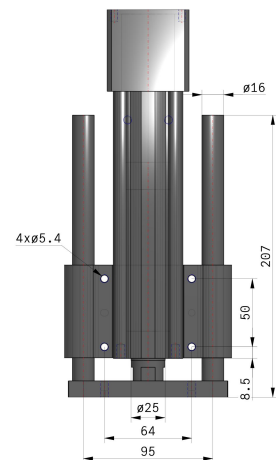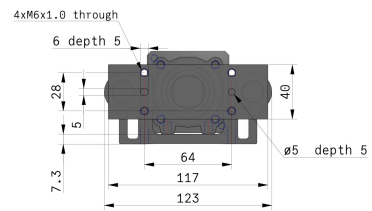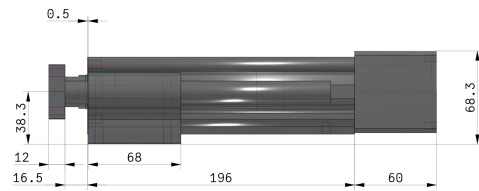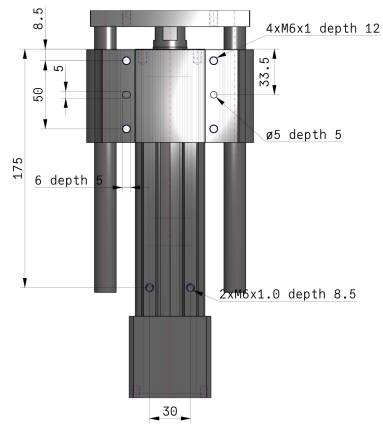

Additional information

Catalogue

[LE_motorless-E_EU.pdf](#)