


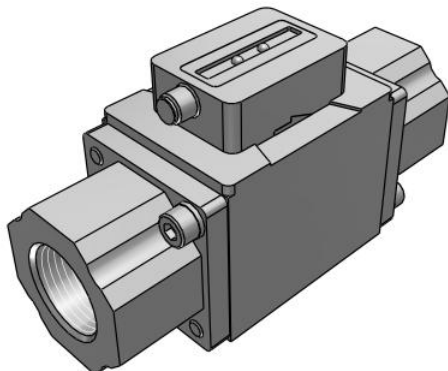


PF3W5-Z, Digital Flow Switch for Water, Remote Sensor Unit, IP65 PF3W511-F06-1TN-Z

Datasheet

General series information

- Compact size.
- Built-in temperature sensor.
- IP65.




Flow meter


Standard specifications

Rated Flow Range	11 (10 to 100 l/min)
Flow Adjustment Valve	W/o Flow Adjustment Valve
Thread	F (G)
Port Size	06 (3/4)
Output Specification/Temperature Sensor	1T (Out 1 Flow Rate: Analogue 1 to 5 V; Out 2 Temperature: Analogue 1 to 5 V; Temperature Sensor: w/Temperature Sensor)
Lead Wire	N (w/o Lead Wire and M8 Connector)
Unit Specification	Instantaneous Flow: L/min, Temperature: °C
Bracket	None
Calibration Certificate	None
Proof pressure	1.5 Mpa
General power supply	12 - 24 VDC ±10 %
Response time	0.5 s/1 s/2 s (linked with the switch output)
Current consumption	50 mA or less
Material	PPS, Stainless steel 304, FKM, SCS13, Non-grease
Operating humidity range	Operation, Storage: 35 to 85 % R.H. (No condensation)
Enclosure	IP65
Repeatability	±2 % F.S.
Applicable fluid	Water and ethylene glycol aqueous solution (with viscosity of 3 mPa·s [3 cP] or less)

Analog current output	4 to 20 mA Max. load impedance: 300 Ω for 12 VDC, 600 Ω for 24 VDC
Analog voltage output	1 to 5 V Output impedance: 1 k Ω
Operating temperature range	0 to 50 °C (No freezing or condensation)
Pressure range	0 - 1 MPa
Accuracy	Display value: ± 3 % F.S. Analogue output: ± 3 % F.S.
Indicator light	Output 1, Output 2: Orange
Withstand voltage	1000 VAC for 1 minute between terminals and housing
Insulation resistance	50 M Ω or more (500 VDC measured via megohmmeter) between terminals and housing
Temperature characteristics	± 5 % F.S. (25 °C standard)
Standards	CE, UL
Flow detection method	Karman vortex
Fluid temperature	0 to 90 °C (No freezing or condensation)
Pressure loss (without flow adjustment valve)	45 kPa or less at the maximum flow
Weight	0.728 Kg

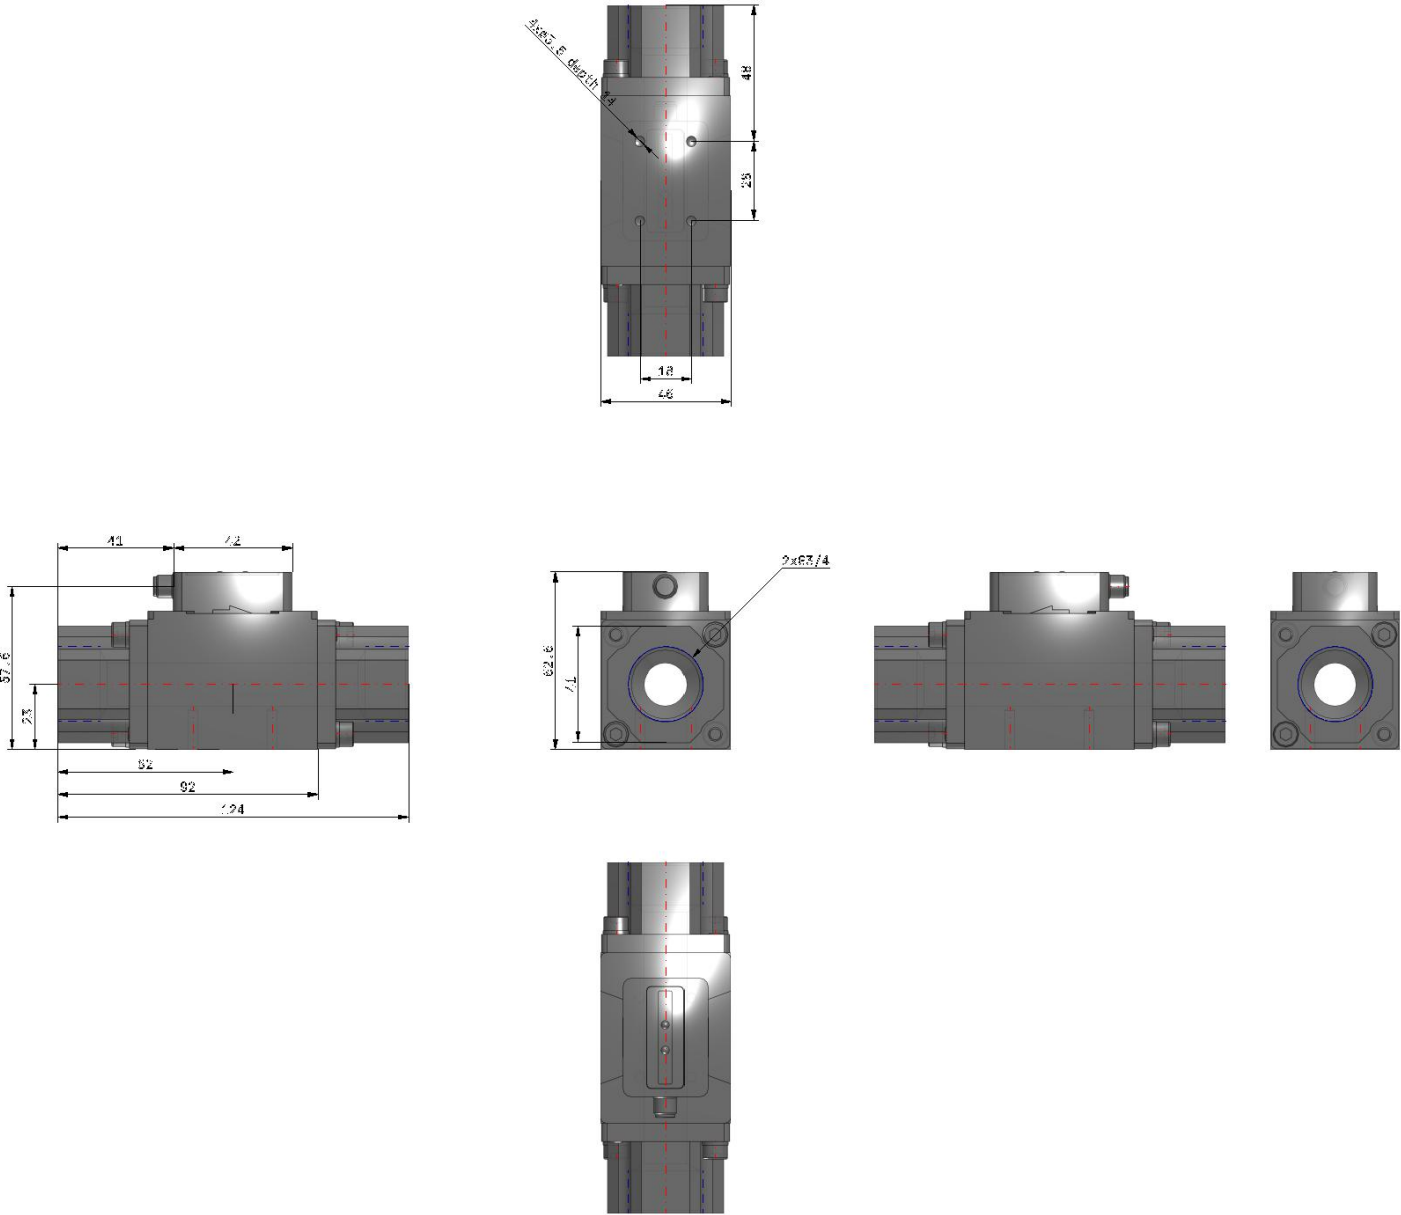

Constructions

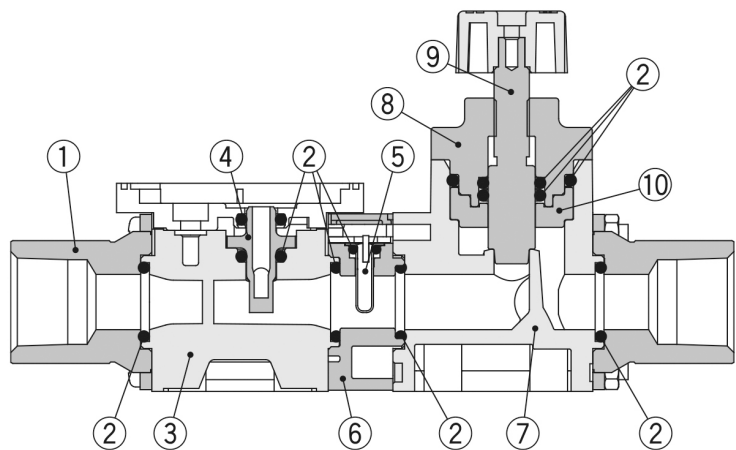

Component Parts

No.	Description	Material	Note
1	Attachment	Stainless steel 304	PF3W704/720/740/504/520/540
		SCS13	Stainless steel 304 equivalent, PF3W711/511
2	Seal	FKM	
3	Body	PPS	
4	Sensor	PPS	
5	Temperature sensor	Stainless steel 304	
6	Temperature sensor body	PPS	
7	Flow adjustment valve body	PPS	
8	Flow adjustment valve cover	PPS	
9	Flow adjustment valve shaft	Stainless steel 304	
10	Shaft support	PPS	

Additional information

Catalogue	PF3W-Z_L-B_EU.pdf
Declaration of conformity	newdoc_pf_tf1w35en.pdf newDoC_PF3W_TF125-158EN.pdf DoC_PF3Wx_TFG0006.pdf newDoC_PF3W_TF1V119EN-A.pdf
Installation manuals	IM_PF3W5_TF2Z082EN-B.pdf IM_PF3W7-L_TF2Z088EN-A.pdf
Operation manuals	OM_PF3W5_OMN0010EN-L.pdf OM_PF3W7_OMW0010EN-I.pdf